# FORTY-FIRST ANNUAL ENGINEERING AND SURVEY REPORT ON WATER SUPPLY CONDITIONS OF THE SANTA YNEZ RIVER WATER CONSERVATION DISTRICT 2018-2019

April 25, 2019





# FORTY-FIRST ANNUAL ENGINEERING AND SURVEY REPORT ON WATER SUPPLY CONDITIONS OF THE SANTA YNEZ RIVER WATER CONSERVATION DISTRICT 2018-2019

**April 25, 2019** 





### 2171 E. Francisco Blvd., Suite K • San Rafael, California 94901 Phone: (415) 457-0701 • Fax: (415) 457-1638 • Website: www.stetsonengineers.com

Northern California • Southern California • Arizona • Colorado • Oregon

1126-13 April 25, 2019 San Rafael

Board of Directors
Santa Ynez River Water
Conservation District
P.O. Box 719
Santa Ynez, California 93460

Re: Forty-First Annual Engineering Survey and Report on Water Supply Conditions of the Santa Ynez River Water Conservation District, 2018-2019

### Dear Board Members:

Transmitted herewith is our Engineering Survey and Report on Water Supply Conditions of the Santa Ynez River Water Conservation District for 2018-2019. This, the Forty-First Annual Report, presents the required and pertinent information for the Board of Directors to make necessary determinations for levying groundwater charges upon the production of groundwater from water-producing facilities (water wells) within the District. As such, it provides information on the status of the groundwater and surface water supplies, as well as the annual production of groundwater from within the District.

Sincerely,

Oliver S. Page

OSP:rrk Enclosures

### TABLES OF CONTENTS

			Page <u>Number</u>
1.0	Intro	oduction	1
	1.1.	Historical Background	1
	1.2.	Description of the District	2
	1.3.	Report Summary	3
	1.4.	Findings and Determinations	7
	1.5.	Sources of Information	8
2.0	Gro	undwater Charges	9
	2.1.	Revenues	10
	2.2.	Groundwater Production	10
	2.3.	Well Registration	12
	2.4.	Major Producers	12
3.0	Prec	ipitation	15
4.0	Surf	ace Water Conditions	17
	4.1.	Basin Surface Water Use	17
	4.2.	State Water Project Water Use	20
	4.3.	River System Flow Conditions	21
	4.4.	Water Rights Releases	21
	4.5.	State Water Code Requirements	26
5.0	Gro	undwater Conditions	27
	5.1.	Sources of Groundwater	27
	5.2.	Groundwater Level Changes	27
	5.3.	Storage Changes	32
	5.4.	Change in Storage Trends	40
	5.5.	Safe Yield	40
	5.6.	Historical Pumpage	40
	5.7.	Overdraft	40
	5.8.	Groundwater Quality	45
		APPENDICES	
A		mary of Provisions in the California Water Code Pertaining to the ementation of a Groundwater Charge	
В	Histo	rical Groundwater Charge Rates	
C	Addi	tional Streamflow Records, Santa Ynez River Basin	
D	Wate	r Rights Releases	
E		ral Description of the Hydrogeology of the Sources of Groundwater n the District	

i

F Water-Level Hydrographs of Selected Wells

G. Well Inventory

## LIST OF TABLES

		Page <u>Number</u>
Table 1	Annual Reported Groundwater Production Within the District	13
Table 2	Monthly Precipitation and Departure From Normal at Cachuma Lake and Lompoc January 2018 through March 2019	
Table 3	Summary of Cachuma Project Operations 1952-53 Through 2017-18	18
Table 4	Flow of the Santa Ynez River at the Lompoc Narrows	22
Table 5	Flow of Salsipuedes Creek Near Lompoc	23
Table 6	Historical Water Rights Releases	25
Table 7	Water-Level Changes Lompoc Plain Subarea 2018 to 2019	29
Table 8	Water-Level Changes Lompoc Upland and Lompoc Terrace Subareas 2018 to 2019	30
Table 9	Water-Level Changes Santa Rita and Buellton Upland Subareas 2018 to	2019 30
Table 10	Water-Level Changes Santa Ynez Upland Subarea 2018 to 2019	31
Table 11	Estimated Annual Change in Groundwater Storage in the Santa Ynez Riv Alluvium for the Past Ten Years and Current Year (2018-19)	
Table 12	Estimated Annual Change in Groundwater Storage in the Lompoc Plain Subarea for the Past Ten Years and Current Year (2018-19)	34
Table 13	Estimated Annual Change in Groundwater Storage in the Lompoc Uplan and Lompoc Terrace Subareas for the Past Ten Years and Current Year (2018-19)	
Table 14	Estimated Annual Change in Groundwater Storage in the Santa Rita Upla Subarea For the Past Ten Years and Current Year (2018-19)	
Table 15	Estimated Annual Change in Groundwater Storage in the Eastern Portion of the Buellton Upland Subarea For the Past Ten Years and Current Year (2018-19)	r
Table 16	Estimated Annual Change in Groundwater Storage in the District Portion of the Santa Ynez Upland Subarea For the Past Ten Years and Current Y (2018-19)	ı ´ear
Table 17	Summary of Change in Quantity of Groundwater in Storage Within the District	41
Table 18	Estimated Average Safe Yield of Principal Sources of Groundwater With the District	
Table 19	Estimated Average Annual Historical Reported Groundwater Pumpage from the Principal Sources of Groundwater Within the District	43
Table 20	Average Annual Overdraft of Principal Sources of Groundwater Within District	
Table 21	Estimated Accumulated Overdraft of Principal Sources of Groundwater Within the District	46

### LIST OF FIGURES

		Following Page No.
1	Santa Ynez River Water Conservation District	4
2	Groundwater Charge Zones, Santa Ynez River Water Conservation District	10
3	Annual Groundwater Production Within the District, 5-Year Moving Average	14
4	Annual Precipitation and Cumulative Departure from Mean for Lompoc, Santa Barbara, Cachuma Lake, and Gibraltar Dam	16
5	Monthly Surface Flow, Santa Ynez River Near Lompoc	22
6	Major Groundwater Sources, Santa Ynez River Basin	28
7	Accumulated Dewatered Storage	42
8	Graphs Showing Total Dissolved Solids, Chloride and Sodium Concentrations in Groundwater from Selected Wells Located in the Lompoc Plain Subarea	46
	•	

### LIST OF TERMS

Accumulated Overdraft	The amount of water necessary to be replaced in the intake areas of the groundwater basins within the District or any zone or zones thereof to prevent the landward movement of salt water into the fresh groundwater body, or to prevent subsidence of the land within the District or any zone or zones thereof, as determined by the board from time to time. Defined in Water Code Section 75505. See also Dewatered Storage
Acre-Foot	Volume of water to flood one acre to a depth of one foot (325,851 gallons).
Ad Valorem property tax	Property tax assessed according to value of property.
AF, AC-FT	Acre-Foot.
Agricultural water	Produced water first used on lands in the production of plant crops or livestock for market.  Defined in Water Code Section 75508.
Alluvium	Sediments deposited through stream or river action.  In Santa Ynez these sediments are generally much younger, less consolidated, with greater hydraulic conductivity, than the surrounding marine and non-marine sediments.
ANA	Above Narrows Account.  Water rights release from Bradbury Dam (Cachuma Reservoir) made to replenish the groundwater basin upstream of the Lompoc Narrows area.

Annual Overdraft	The amount, determined by the board, by which the production of water from groundwater supplies within the District or any zone or zones thereof during the water year exceeds the natural replenishment of such groundwater supplies in such water year. Defined in Water Code Section 75506.
BNA	Below Narrows Account.  Water rights release from Bradbury Dam (Cachuma Reservoir) made to replenish the groundwater basin downstream of the Lompoc Narrows area, i.e. for the Lompoc Plain subarea.
Board	Refers to the five Directors of the Santa Ynez River Water Conservation District.
Bradbury Dam	Completed in 1953, the dam impounds the Santa Ynez River to form Lake Cachuma. Bradbury Dam and water rights releases are operated by the USBR. The dam stores floodwaters of the Santa Ynez River and SWP water.
Cachuma Member Units	Beneficiary organizations of the Cachuma Project. Consists of: Carpinteria Valley Water District City of Santa Barbara Goleta Water District Montecito Water District Santa Ynez River Water Conservation District, Improvement District No. 1 (ID No. 1).
Calendar Year	January 1 through December 31.
CCWA	Central Coast Water Authority.  Public entity which owns and operates pipelines and water treatment facilities enabling deliveries of water from the State Water Project to Santa Barbara and San Luis Obispo Counties.
CFS	Cubic Feet per Second.  Flow rate units commonly used in describing surface water flows.
Contractor	Organization contracted to receive State Water Project water.  Term is used by the Department of Water Resources as well as CCWA.
Current Water Year	The water year in which the investigation and report on the groundwater conditions of the District is made, the hearing thereon held, and the determination is made by the board as to whether a zone or zones should be established and a groundwater charge levied therein.  Defined in Water Code Section 75507 (b).
Dewatered Storage	Unused and available space in the aquifer available for storing additional groundwater. See also Accumulated Overdraft.
Deposits	See Unconsolidated Deposits.
District	Santa Ynez River Water Conservation District.  Water conservation district representing the interests of the Santa Ynez and Lompoc Valleys.

District Fiscal Year	July 1 through June 30.
Drought Buffer	A term used to identify a source of supply within the State Water Project (SWP) system that will provide a higher level of reliability during times of drought. For most CCWA water purveyors, the drought buffer equals 10% of Table A amount.
Ensuing Water Year	The water year immediately following the current water year.  Defined in Water Code Section 75507 (d).
Entitlement	A term used formerly to refer to "Table A" amounts. Table A amounts are the maximum amount of State Water Project (SWP) water that the State agreed to make available to each SWP contractor for delivery during the year.
Forebay	Generally, a term applied to refer to a natural or artificial body of water below a dam. In the Santa Ynez River Basin, the term is used to refer to the area where most of the percolation occurs from the Santa Ynez River to the Lompoc Plain aquifer, which consists of the eastern four miles of the river beginning at the Robinson Road Bridge and downstream to Floradale Avenue.
Groundwater	All water beneath the earth's surface, but does not include water which is produced with oil in the production of oil and gas, or in a bona fide mining operation, or during construction operations, or from gravity or artesian springs.  Defined in Water Code Section 75502.
ID No.1	Santa Ynez River Water Conservation District, Improvement District No. 1.  Special improvement district which distributes and serves municipal and irrigation water in the Santa Ynez Uplands.
Lake Cachuma	Reservoir formed by Bradbury Dam.
MG/L	Milligrams per Liter.  Concentration units of mass per volume. In fresh water this is approximately equivalent to parts per million (ppm).
NOAA	National Oceanic and Atmospheric Administration Federal agency organized under the Department of the Commerce concerned with oceans, waterways, and atmosphere.
Operator	Public agencies, federal, state, and local, private corporations, firms, partnerships, limited liability companies, individuals, or groups of individuals, whether legally organized or not. Defined in Water Code Section 75501.
Other Water	Water used for purposes <u>not</u> including: agriculture or irrigation at parks, golf courses, schools, cemeteries and publicly owned historic sites. Generally, refers to municipal, industrial or domestic uses of pumped or produced water.
Overdraft	Net water loss to groundwater basin. Calculated as the increase in dewatered storage.

Owner	Person to whom a water-producing facility is assessed by the county assessor of an affected county, or, if not separately assessed, the person who owns the land upon which a water-producing facility is located.  Defined in Water Code Section 75501.
Person	See Operator.
Preceding Water Year	The water year immediately preceding the current water year. Defined in Water Code Section 75507 (c).
Precipitation	Combination of rainfall, snow, and any other form of water vapor that condenses on the ground.
Producer	An entity (person or corporate) which "produces" water by pumping groundwater from a well.
Production	The act of extracting groundwater by pumping or otherwise.  Defined in Water Code Section 75503.
Project	Cachuma Project. Includes Bradbury Dam, Tecolote Tunnel and all conveyance infrastructure to deliver project water to the South Coast.
Pump Charge	Fee for extraction of groundwater from a well.
Purchased Water	See definition of Turnback Pool Water. Refers to State Water Project (SWP) water purchased from another SWP Contractor.
Safe Yield	The amount of water that can be withdrawn from a groundwater basin without producing an undesired effect.
SBCWA	Santa Barbara County Water Agency.  County agency organized under the Santa Barbara County  Public Works Department tasked with providing technical support to other public agencies and manages several water supply and public information programs.
South Coast	Located in southern Santa Barbara County and includes the communities of Carpinteria, Goleta and portions of the Gaviota Coast, Montecito, Santa Barbara and Summerland.
Special Irrigation Water	Produced water used for irrigation purposes at parks, golf courses, schools, cemeteries and publicly owned historic sites.
Streamflow Infiltration	Stream or river water that percolates into the subsurface.
Surface Water	Water on the ground surface, including lakes, rivers, and canals.
SWP	Water storage and delivery system operated by California Department of Water Resources which transports water from northern California to users located primarily in the San Francisco Bay area and southern California.
SWRCB	State of California Water Resources Control Board.

Turnback Pool	water that SWP Tab	Pool Water refers to State Water Project (SWP) contractors may choose to offer from their allocated le A water to other Contractors through two pools in and March.	
Unconsolidated Deposits	Sedimentary material that is loosely arranged and have not been cemented (generally through a combination of physical compaction or chemical deposition) into a cohesive whole.		
USBR	Federal by concerned	au of Reclamation.  I reau organized under the Department of the Interior  I with construction and operation of dams.  Ily, operates Bradbury Dam.	
USGS	Federal bu	ogical Survey.  ureau organized under the Department of the Interior with natural science research.	
Water Code	California	state law related water and water districts.	
Water-producing facility	production District.	the or method, mechanical or otherwise, for the n of water from the groundwater supplies within the n Water Code Section 75504.	
Water Year (hydrologic)One year period from October 1 through September 30 of the following year.			
Water Year (statutory)	y)One year period from July 1 through June 30 of the following year, defined by Water Code Section 75507 (a).		
WR 73-37	SWRCB (	Order of 1973.	
	Order addresses the storage and release of water in Lake Cachuma, and the operation of the ANA and BNA accounts.		
WR 89-18	SWRCB Order of 1973, as amended in 1989.  Amends the permits regarding the operation of the Cachuma Project.		
WR 94-5SWRCB Order of 1973, as amended in 1994.  Amends the permits regarding the operation of the Cachuma Project.			
Zones		eographic areas of the Santa Ynez Basin within the ith distinct groundwater charge rates:	
	Zone A	Santa Ynez River alluvial deposits: Santa Ynez subarea, Buellton subarea, and Santa Rita subarea	
	Zone B	Lompoc Area: Lompoc Plain subarea, Lompoc Upland subarea, Lompoc Terrace subarea	
	Zone C	Miscellaneous unconsolidated deposits and consolidated rocks	
	Zone D	Buellton Upland subarea	
	Zone E	Santa Ynez Upland subarea	
	Zone F	Santa Rita Upland subarea	

Cover Photograph: Detroit Photographic Co. California. Fording the Santa Inez River.

California Santa Ynez River United States, None. [Between 1898 and

1905] [Photograph] Retrieved from the Library of Congress,

https://www.loc.gov/item/2008678080/.

**Second Printing** 

### 1.0 INTRODUCTION

This, the Forty-First Annual Engineering Survey and Report on Water Supply Conditions of the Santa Ynez River Water Conservation District, 2018-2019 presents the required and pertinent information for the Board of Directors to make the necessary determinations with respect to levying groundwater charges upon the production of groundwater from water-producing facilities within the District. As such, it provides information on the status of groundwater and surface water supplies as well as the annual production of groundwater from within the District.

This introduction provides: (1) historical background on the Santa Ynez River Water Conservation District (hereinafter called District), inclusive of its purpose and its use of pump charges to finance its activities in part; (2) an overview of the boundaries and water resources of the District; (3) a summary of this report; and (4) findings and determinations required by the Water Code to establish the amount and set the rates of groundwater charges necessary to generate sufficient revenue to supplement existing revenue sources of the District.

Subsequent chapters provide information on groundwater production and charges (Chapter 2.0), precipitation (Chapter 3.0), surface water conditions (Chapter 4.0) and groundwater conditions (Chapter 5.0). Additional information on provisions of the Water Code pertinent to groundwater charges, historical groundwater charge rates, streamflow records, water right releases, a general description of the hydrogeology of groundwater sources, water-level hydrographs of selected wells and well inventory data are found in the Appendices.

### 1.1. HISTORICAL BACKGROUND

The District was formed in 1939 for the primary purpose of protecting water rights on the lower Santa Ynez River. Reservoirs had been constructed in the upper reaches of the Santa Ynez River by the City of Santa Barbara (Gibraltar Reservoir) and the Montecito Water District (Jameson Lake), and litigation by downstream riparian landowners challenging those projects was not totally successful. Additional projects or exportation of water were being studied and the Cachuma Project was administratively authorized under

Section 9(a) of the Federal Reclamation Act of 1939. For these reasons, the people of the Santa Ynez and Lompoc Valleys joined together to form the District. The purpose of the District is to protect, and if necessary, augment the water supplies of the District, which are necessary for the public health, welfare and safety of all residents.

In recent years, the District has received only about half of its necessary operating funds from ad valorem property taxes. The Water Conservation District Law of 1931 includes a detailed procedure set forth in Part 9 of Division 21 of the Water Code (Water Code Section 75500 through 75642) providing for implementation of a pump charge. Initiated by the District in 1979, these charges are authorized to be levied on the production of groundwater from water-producing facilities. They are levied as an additional source of revenue to the extent that such charges are deemed necessary by the District Directors to cover the remaining operating funds to accomplish District activities, all associated with managing, protecting, conserving and enhancing water resources within the District.

Groundwater charges are incurred by the owners of water production facilities and are charged at uniform rates (for each category of water) within the District or each Zone thereof, based on the amount of groundwater produced. Production is measured by water meter or is estimated by a variety of methods acceptable to the District. Use of meters has never been required. However, all methods used to estimate production are based on criteria relating to water use. Various legal remedies exist for non-registration of wells, non-payment of groundwater charges, and submittal of fraudulent information. Should court action be necessary and a judgment obtained, a lien is placed against the water-producing facility owner's real or personal property.

### **1.2. DESCRIPTION OF THE DISTRICT**

The District, comprised of two non-contiguous parcels, encompasses approximately 180,000 acres including most of the Santa Ynez River watershed from the mouth of the river at Surf to a point about three miles downstream of Bradbury Dam and smaller watershed areas northeast and south of Lake Cachuma. Ground surface elevations vary from sea level at Surf to more than 1,700 feet above sea level along portions of the southern District boundary. The terrain south of the river rises relatively steeply to the crest of the Santa Ynez Mountains. North of the river the rise in elevation is generally gradual over upland terraces

and hilly areas. The District boundary and various geographic features within or adjacent to the District are shown on Figure 1.

The Santa Ynez River flows westerly, generally parallel to the southern boundary of the District until entering the Lompoc Plain. Thence, it flows northwesterly and westerly across the Plain to the Pacific Ocean. The flow of the river is intermittent throughout the District, carrying mainly flood flows from tributary watershed land downstream of Bradbury Dam and occasional spills and releases of water from Lake Cachuma. During summer months, water is released from Lake Cachuma to meet downstream water rights.

Groundwater occurs within the District primarily in younger unconsolidated alluvial deposits and in older unconsolidated deposits. In most cases, the older and often deeper deposits are not in hydrologic continuity with the shallower alluvial deposits. The major occurrences of groundwater are in the alluvial deposits of the Santa Ynez River and Lompoc Plain, and in the older unconsolidated deposits of the Santa Ynez Upland, Lompoc Upland, Buellton Upland, Santa Rita Upland and the Lompoc Terrace subareas.

Water production within the District is for domestic, municipal, industrial and agricultural purposes. With the exception of certain federal installations, the City of Lompoc and the smaller communities of Solvang, Buellton, Santa Ynez and Los Olivos, most of the District is a mixture of rural agriculture and suburban development.

### 1.3. REPORT SUMMARY


The following is a summary of the information contained in this report.

1. Revenues from groundwater charges collected by the District for production during the July-June fiscal year 2017-18 amounted to \$408,671.71. Revenues collected through April 3, 2019 for production during the first half of fiscal year 2018-19 amounted to \$294,678.58. An additional \$7,514.95 has been received as late payments and assessments in connection with production prior to fiscal year 2017-18.

- 2. The Board, for 2018-19, reaffirmed the following six groundwater charge zones for the District.
  - Zone A District portion of the Santa Ynez River alluvial channel from San Lucas Bridge downstream to Lompoc Narrows.
  - Zone B District portion of the Lompoc Plain, Lompoc Upland and Lompoc Terrace groundwater subareas.
  - Zone C All other portions of the District not included in Zones A, B, D, E, and F.
  - Zone D District portion of the Buellton Upland subarea.
  - Zone E District portion of the Santa Ynez Upland subarea.
  - Zone F District portion of the Santa Rita Upland subarea.
- 3. The groundwater charge rates per acre-foot of production for fiscal year 2018-19 were as follows:


	Agricultural Water	Other Water	Special Irrigation Water
Zone A	7.15	25.00	14.30
Zone B	7.15	25.00	14.30
Zone C	7.15	25.00	14.30
Zone D	7.15	25.00	14.30
Zone E	7.15	25.00	14.30
Zone F	7.15	25.00	14.30

- 4. As of April 3, 2019, reported groundwater production for fiscal year 2017-18 totaled 50,912 acre-feet. This is about 102 percent of the 50,126 acre-feet total water production reported for fiscal year 2016-17.
- 5. Groundwater production, reported as of April 3, 2019 for the first half of fiscal year 2018-19 totaled 23,833 acre-feet or about 96 percent of the 24,796 acre-feet total water production reported for the first half of fiscal year 2017-18 as of April 6, 2018.

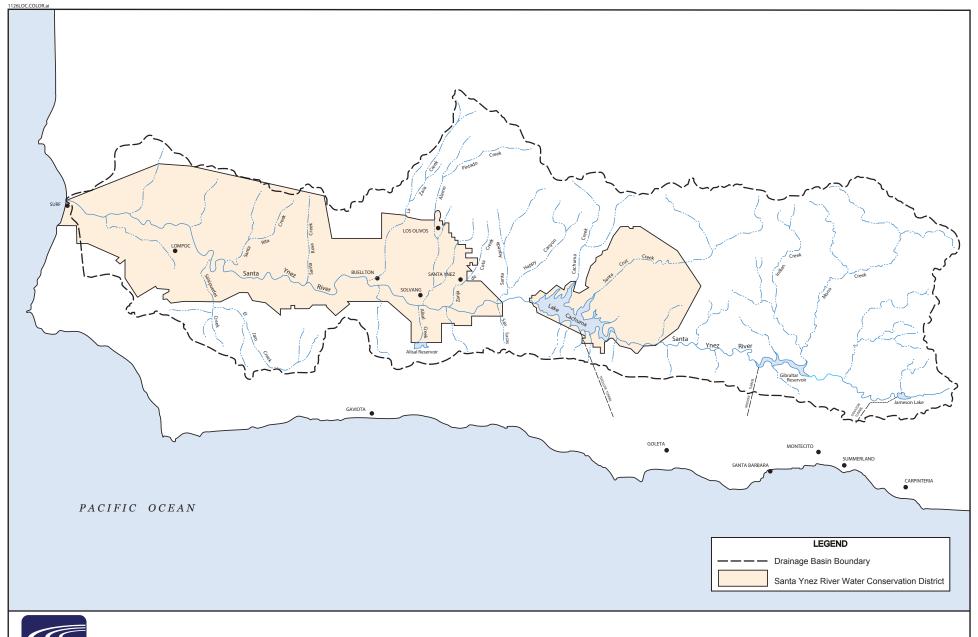



SANTA YNEZ RIVER WATER CONSERVATION DISTRICT





6. Annual reported (as of April 3, 2019) groundwater production within the District for the past five years was as follows:

Fiscal Year (July-June)	Total Production (Acre-Feet)
2013-14	55,998
2014-15	55,009
2015-16	53,031
2016-17	50,126
2017-18	50,912

- 7. The projected estimated total groundwater production for fiscal years 2018-19 and 2019-20 is 50,900 acre-feet.
- 8. As of April 3, 2019, 1,134 wells have been registered with the District. Of that number, approximately 917 are active and 217 are inactive.
- 9. Precipitation at Cachuma Lake and Lompoc during calendar year 2018 and the October-September hydrologic water year 2018-19 through March was as follows:

	Cachuma Lake	Lompoc
2018 Calendar Year Precipitation (Inches)	13.34	12.05
Percent of Normal	60	75
2018-19 Hydrologic Water Year through March 2019 partial year (Inches)	23.37	19.09
Percent of Normal	117	132

Source: Santa Barbara County Flood Control District and National Oceanic and Atmospheric Administration (NOAA).

10. During hydrologic water year 2017-18, the flow of the Santa Ynez River at the Lompoc Narrows was 4,812 acre-feet. Through March 2019, the flow at the Narrows for hydrologic water year 2018-19 was greater than 38,228 acre-feet.

11. During the summer of 2018 the following water rights releases were made:

Month	Above Narrows Account (Acre-Feet)	Below Narrows Account (Acre-Feet)	Total (Acre-Feet)
August	6,297	938	7,235
September	309	510	819
Total	6,606	1,448	8,054

Source: U.S. Bureau of Reclamation

12. Deliveries to Central Coast Water Authority contractors receiving State Water Project water within the District were as follows:

Eigest Veen	State Water Project Deliveries (Acre-Feet)			
Fiscal Year (July-June)	Improvement District No. 1	City of Solvang	City of Buellton	Vandenberg AFB
2017-18	1,622	562	276	2,117
2018-19 (First Half)	700	345	70	1,230

Source: Central Coast Water Authority

13. The estimated change in the quantity of groundwater in storage within the District and the estimated accumulated dewatered storage are summarized below.

Source of Groundwater	Change in Storage 2018 to 2019 (Acre-Feet)	Accumulated Dewatered Storage 2018-19 (Acre-Feet)
Santa Ynez River Alluvium	1,300	15,300
Lompoc Plain	1,800	18,000
Lompoc Upland	-200	35,800
Lompoc Terrace	400	600
Santa Rita Upland	1,000	13,400
Buellton Upland (Eastern Portion)	-200	1,300
Santa Ynez Upland (District)	-1,800	59,300
TOTAL	2,300	143,700

### 1.4. FINDINGS AND DETERMINATIONS

The findings of this investigation are summarized below so that the Board may make the determinations required by law (Water Code Section 75574) for the July 1-June 30 water year (statutory). These findings are based upon either Spring 2019 water-level data or pumpage reported through April 3, 2019 and are applicable to the entire District.

- (a) The average annual overdraft for the immediate past ten (10) water years (statutory): 4,230± acre-feet;
- (b) The estimated annual overdraft for the current (2018-19) water year (statutory): 2,200± acre-feet;
- (c) The estimated annual overdraft for the ensuing (2019-20) water year (statutory): 2,200± acre-feet;
- (d) The accumulated overdraft as of the last day of the preceding (2017-18) water year (statutory): 146,000± acre-feet in terms of accumulated dewatered storage. Accumulated overdraft as defined in Water Code Section 75505 is nominal, at this time:
- (e) The estimated accumulated overdraft as of the last day of the current (2018-19) water year (statutory): 143,700± acre-feet in terms of accumulated dewatered storage. Accumulated overdraft as defined in Water Code 75505 is nominal, at this time;
- (f) The estimated amount of agricultural water to be withdrawn from the groundwater supplies of the District for the ensuing water year (2019-20); 37,120 acre-feet of agricultural water and 1,600 acre-feet of special irrigation water;
- (g) The estimated amount of water other than agricultural water or special irrigation water to be withdrawn from the groundwater supplies of the District for the ensuing (2019-20) water year (statutory): approximately 12,200 acre-feet;
- (h) The estimated amount of water necessary for surface distribution for the ensuing (2019-20) water year (statutory): approximately 4,300 acre-feet scheduled to be delivered by the Central Coast Water Agency to contractors within the District;
- (i) The amount of water, which is necessary for the replenishment of the groundwater supplies of the District: 143,700± acre-feet to completely replenish accumulated dewatered storage;
- (j) The amount of water the District is obligated by contract to purchase: The District is not obligated by contract to purchase water.

The amount of groundwater charge levied by the Board should be based upon the estimated amount of supplemental revenue required to continue essential District activities without increasing the cost of water to a producer to a point where it is not financially

feasible for the producer to utilize the water. The State Water Code requires that non-agricultural rates cannot be less than three times, nor more than five times the rate established for agricultural water and special irrigation water rates shall not be less than the rate for agricultural water and shall not be more than the rate for non-agricultural water.

The actual groundwater charge the Board will levy for 2019-20 will be based upon the District's anticipated expenses and revenue.

### 1.5. SOURCES OF INFORMATION

The information and data utilized to prepare this report were obtained from the following sources:

- Pumpage, revenue and well registration District
- State Water Project use Central Coast Water Authority
- Water-level measurements Santa Barbara County Water Agency (SBCWA), U.S. Geological Survey (USGS), City of Buellton and U.S. Bureau of Reclamation (USBR)
- Precipitation measurements Santa Barbara County Flood Control District
- Water quality analyses USGS
- Lake Cachuma operations USBR
- Surface water flow USGS

### 2.0 GROUNDWATER CHARGES

The Board has previously established six groundwater charge zones for the District which are described below.

- Zone A District portion of the Santa Ynez River alluvial channel from San Lucas Bridge downstream to Lompoc Narrows.
- Zone B District portion of the Lompoc Plain, Lompoc Upland and Lompoc Terrace groundwater subareas.
- Zone C All other portions of the District not included in Zones A, B, D, E and F.
- Zone D District portion of the Buellton Upland subarea.
- Zone E District portion of the Santa Ynez Upland subarea.
- Zone F District portion of the Santa Rita Upland subarea.

A map showing the location of these zones is included as Figure 2.

For fiscal year 2018-19 the Board established the following groundwater charge rates, in dollars per acre-foot of production, for each zone.

	Agricultural Water	Other Water	Special Irrigation Water
Zone A	7.15	25.00	14.30
Zone B	7.15	25.00	14.30
Zone C	7.15	25.00	14.30
Zone D	7.15	25.00	14.30
Zone E	7.15	25.00	14.30
Zone F	7.15	25.00	14.30

The above rates are based on a ratio of 1:3.5 with other water rates three and one-half times the agricultural rates. Special irrigation water rates are at a ratio of 1:2 with agricultural rates. More information on groundwater charge rates, including a summary of historical rates, is presented in Appendices A and B.

### 2.1. REVENUES

Revenues collected by the District based on groundwater production through April 3, 2019 are presented below for specific time frames.


	2017-18	2016-17	2015-16
Fiscal Year (July through June)	\$408,671.71	\$287,817.06	\$268,572
First-Half of Fiscal Year (July through December)	\$294,678.58	\$203,061.03	\$154,842
Years Prior	\$7,514.95	\$1,605.59	\$485

### 2.2. GROUNDWATER PRODUCTION

Summarized below is the reported (as of April 3, 2019) water production within the District, in acre-feet, for fiscal year 2017-18.


	Agricultural Water	Other Water	Special Irrigation Water	Total
Zone A	11,538.80	2,429.20	754.27	14,722.27
Zone B	17,818.55	6,160.55	808.75	24,787.85
Zone C	86.36	1,222.72	14.30	1,323.38
Zone D	2,624.32	553.31	23.84	3,201.47
Zone E	2,911.01	1,710.67	0.27	4,621.95
Zone F	2,137.47	118.20	0.00	2,255.67
TOTAL	37,116.51	12,194.65	1,601.43	50,912.59

The above total water production reported, as of April 3, 2019, for fiscal year 2017-18 is about 103 percent of the total water production reported for fiscal year 2016-17 as of April 6, 2018.

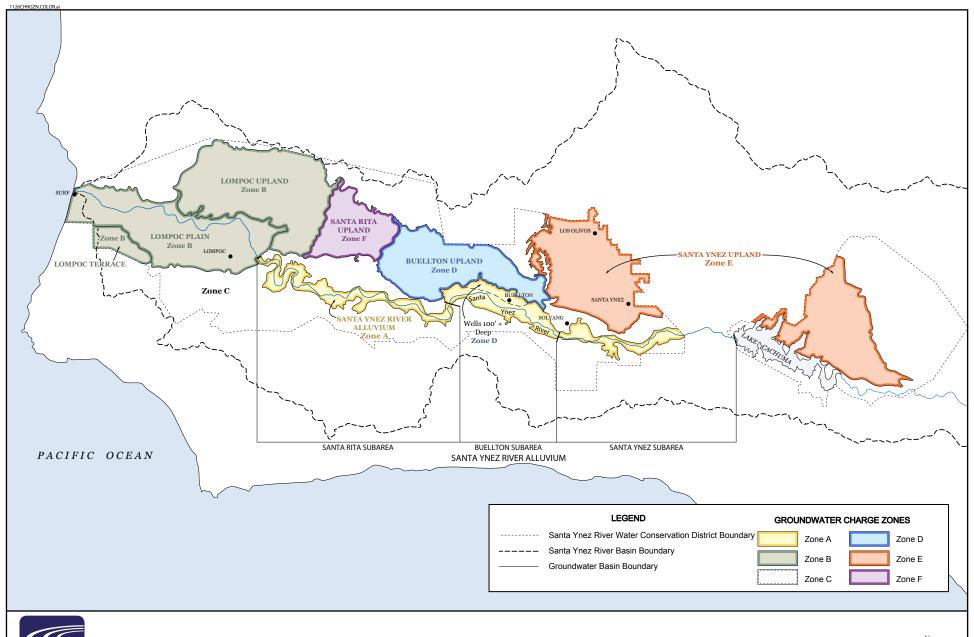



GROUNDWATER CHARGE ZONES
SANTA YNEZ RIVER WATER CONSERVATION DISTRICT





The reported (as of April 3, 2019) water production within the District, in acre-feet, for the first half of fiscal year 2018-19 is as follows:

	Agricultural Water	Other Water	Special Irrigation Water	Total
Zone A	5,738.29	1,388.46	376.86	7,503.61
Zone B	7,539.14	3,067.35	429.81	11,036.30
Zone C	24.62	610.56	6.50	641.68
Zone D	959.22	317.09	20.00	1,296.31
Zone E	1,482.50	865.28	6.14	2,353.92
Zone F	927.69	73.42	0.00	1,001.11
TOTAL	16,671.46	6,322.16	839.31	23,832.93

The above total water production reported, as of April 3, 2019, for the first half of fiscal year 2018-19 is about 96 percent of the total water production reported for the first half of fiscal year 2017-18 as of April 6, 2018. This does not include at least 148 acre-feet of additional late reported production totaling greater than 23,981 acre-feet for 2018-19.

Additional production that actually occurred prior to fiscal year 2017-18 was reported during the current fiscal year (2018-19). That late reported production, in acre-feet, is as follows:

	Agricultural Water	Other Water	Special Irrigation Water	Total
Zone A	125.20	3.82	0.00	129.02
Zone B	261.25	11.10	0.00	272.35
Zone C	0.00	0.00	0.00	0.00
Zone D	114.15	3.63	0.00	117.78
Zone E	765.65	96.65	0.00	862.30
Zone F	1,285.87	94.62	0.00	1,380.49
TOTAL	2,552.12	209.82	0.00	2,761.94

The above late reported production, as well as late reported production in previous years, has been posted to the appropriate years. Table 1 summarizes the total annual production for the period 1979-80 through 2017-18 reported to the District as of April 3, 2019. Figure 3 shows the 5-year average annual groundwater production by zone for the same period. The values of production shown on Table 1, Figure 3, and in this "Groundwater Production" section are subject to future revision as additional late reported production is received by the District.

The projected groundwater production, in acre-feet, within the District for the ongoing fiscal year (2018-19) and next fiscal year (2019-20) is tabulated below. The estimates are based on the reported groundwater production for fiscal year 2017-18.

	Agricultural Water	Other Water	Special Irrigation Water	Total
Zone A	11,540	2,430	755	14,725
Zone B	17,820	6,160	810	24,790
Zone C	85	1,225	15	1,325
Zone D	2,625	555	25	3,205
Zone E	2,910	1,710	0	4,620
Zone F	2,135	120	0	2,255
TOTAL	37,115	12,200	1,605	50,920

### 2.3. WELL REGISTRATION

As of April 3, 2019, 1,134 wells have been registered with the District. Of that number, approximately 917 are active and 217 are inactive.

### 2.4. MAJOR PRODUCERS

The major water producers, those reporting pumpage by ownership and/or lease during fiscal year 2017-18, as of April 3, 2019, were as follows:

(Acre-Feet)

	Agricultural Water			Other Water					Special Irrigation Water <sup>c</sup>												
Fiscal																					
<u>Year</u> "	Zone A	Zone B	Zone C	Zone D	Zone E	Zone F	<u>Total</u>	Zone A	Zone B	Zone C	Zone D	Zone E	Zone F	<u>Total</u>	Zone A	Zone B	Zone C Zo	ne D	Zone E Zone	<u>Tot</u>	al <u>Production</u>
1979-80	6,363	7,233	7,322				20,918	1,815	6,399	2,362				10,576							31,494
1980-81	7,535	9,486	7,563				24,584	1,940	7,283	2,308				11,531							36,115
1981-82	7,780	18,037	7,889				33,706	2,471	7,506	4,147				14,124							47,830
1982-83	7,501	13,934	7,575				29,010	2,110	6,644	2,162				10,916							39,926
1983-84	9,427	14,865	6,581				30,873	2,380	6,714	2,382				11,476							42,349
1984-85	8,418	15,589	7,124				31,131	2,380	7,905	2,159				12,444							43,575
1985-86	8,621	15,240	7,269				31,130	2,119	9,407	2,147				13,673	554	303	15				372 45,675
1986-87	9,251	19,656	5,567				34,474	1,794	8,992	1,995				12,781	523	955	68			1,	546 48,801
1987-88	6,652	19,839	6,162				32,653	2,358	8,546	2,425				13,329	594	805	34			1,	433 47,415
1988-89	8,303	19,218	6,417				33,938	2,750	7,445	1,696				11,918	738	1,002	40			1,	780 47,636
1989-90	8,265	17,358	8,801				34,424	2,516	8,495	2,162				13,173	658	1,028	26			1,	712 49,309
1990-91	8,495	18,018	10,804				37,317	2,433	7,547	2,589				12,569	669	981	41			1,0	51,577
1991-92	8,982	18,960	7,078				35,020	2,761	6,698	1,968				11,427	753	1,163	20			1,	936 48,383
1992-93	7,852	19,122	7,186				34,160	1,993	7,307	2,420				11,720	1,052	1,205	250			2,	507 48,387
1993-94	8,076	16,748	713	1,108	3,505	644	30,794	1,662	7,681	1,224	430	1,930	78	13,005	1,059	1,005	0	57	0	0 2,	121 45,920
1994-95	8,173	14,190	1,060	843	3,018	970	28,254	2,098	7,777	1,081	430	1,703	66	13,155	1,056	729	0	36	0	0 1,	321 43,230
1995-96	8,993	16,327	743	1,158	4,672	899	32,792	2,144	8,585	1,079	469	2,993	50	15,320	941	839	10	52	0	0 1,	342 49,954
1996-97	8,977	19,235	787	970	4,347	1,441	35,757	2,065	8,075	958	461	2,924	69	14,552	935	988	10	22	0	0 1,	955 52,264
1997-98	9,627	19,197	429	1,034	2,822	1,148	34,257	1,581	7,463	978	264	1,658	78	12,022	838	445	74	11	0	0 1,	368 47,647
1998-99	9,702	18,724	115	1,693	3,088	1,283	34,605	1,997	7,432	995	236	1,637	87	12,384	862	836	17	13	8	0 1,	736 48,725
1999-00	10,319	19,832	113	1,739	3,480	1,556	37,039	2,262	7,906	1,208	340	2,084	83	13,883	976	1,152	17	19	0	0 2,	164 53,086
2000-01	11,169	20,261	121	2,247	3,306	1,210	38,314	2,524	7,395	1,241	458	1,526	103	13,247	906	1,054	12	32	0	0 2,	004 53,565
2001-02	11,170	21,174	148	2,311	2,897	1,446	39,146	2,806	7,509	1,476	537	1,284	122	13,734	899	1,132	17	23	0	0 2,	071 54,951
2002-03	10,515	17,559	153	1,549	2,744	1,374	33,894	2,048	7,684	1,084	584	845	109	12,354	1,012	1,058	10	27	0	0 2,	107 48,355
2003-04	11,193	15,602	189	1,972	3,018	1,267	33,241	2,260	8,027	1,067	508	1,455	106	13,423	965	1,161	20	14	0	0 2,	160 48,824
2004-05	10,622	15,768	141	1,856	2,439	1,081	31,907	2,489	7,285	1,129	348	1,067	107	12,425	876	861	19	8	0	0 1,	764 46,096
2005-06	10,044	16,854	158	1,965	2,155	1,416	32,592	1,991	7,624	880	265	1,194	104	12,058	726	883	20	3	0	0 1,	632 46,282
2006-07	10,756	15,834	172	1,719	2,679	1,503	32,663	1,945	8,134	896	587	1,645	139	13,346	796	1,039	23	35	0	0 1,	393 47,902
2007-08	11,709	15,892	186	2,461	3,309	1,907	35,464	2,215	8,173	886	813	1,844	144	14,075	870	1,171	30	46	0	0 2,	117 51,656
2008-09	11,182	16,004	174	2,823	3,155	1,748	35,086	2,261	7,493	848	984	2,167	149	13,902	858	1,126	22	69	0	0 2,	075 51,063
2009-10	11,072	16,381	152	2,711	2,551	1,808	34,675	2,610	7,006	830	1,026	1,317	154	12,943	795	1,053	20	46	0	0 1,	914 49,532
2010-11	9,635	17,493	161	2,227	2,652	1,791	33,959	1,355	6,869	1,470	955	1,208	145	12,002	568	939	17	33	0	0 1,	557 47,518
2011-12	10,445	18,276	169	2,631	2,742	2,175	36,438	1,510	6,859	982	711	1,702	152	11,916	620	900	21	29	0	0 1,	570 49,924
2012-13	11,498	21,257	145	2,357	3,365	1,863	40,485	2,309	7,084	1,022	708	2,277	139	13,539	762	1,088	18	32	0	0 1,	900 55,924
2013-14	11,760	19,336	121	3,043	3,613	2,074	39,947	2,443	7,203	1,121	750	2,325	146	13,988	804	1,203	18	38	0	0 2,	063 55,998
2014-15	12,342	19,511	106	3,468	3,067	2,116	40,610	2,610	6,376	771	1,012	1,879	136	12,784	619	939	11	46	0	0 1,	55,009
2015-16	12,673	18,552	76	2,730	3,346	2,313	39,690	2,271	5,993	1,081	909	1,585	110	11,949	576	765	13	38	0	0 1,	392 53,031
2016-17	11,420	18,159	77	2,890	2,914	1,950	37,410	2,062	5,768	1,099	673	1,471	104	11,177	626	867	12	34	0	0 1,	539 50,126
2017-18	11,539	17,819	86	2,624	2,911	2,137	37,116	2,429	6,161	1,223	553	1,711	118	12,195	754	809	14	24	0	0 1,	50,912

<sup>&</sup>lt;sup>a</sup> Revised April 3, 2019

### Ground-water charge zones since 1993-94 include the District portion of:

<sup>&</sup>lt;sup>b</sup> Ground-water charge zones for the period 1979-80 through 1992-93 included the District portion of:

Zone A Santa Ynez River alluvial channel from San Lucas Bridge downstream to Lompoc Narrows.

Zone B Lompoc Plain, Lompoc Upland subarea (including Santa Rita Upland subarea) and Lompoc Terrace.

Zone C All portions of the District not included in Zones A and B. Includes, among other areas, the Santa Ynez Upland and Buellton Upland subareas.

Zone A Santa Ynez River alluvial channel from San Lucas Bridge downstream to Lompoc Narrows.

Zone B Lompoc Plain, Lompoc Upland subarea and Lompoc Terrace.

Zone C All other portions of the District not included in Zones A, B, D, E, and F.

Zone D Buellton Upland subarea.

Zone E Santa Ynez Upland subarea.

Zone F Santa Rita Upland subarea.


<sup>&</sup>lt;sup>c</sup> Based upon a 1984 amendment to the California Water Code. First year for reporting special irrigation water production was 1985-86.

<sup>&</sup>lt;sup>d</sup> July 1 through June 30.

	Major Water Producer Fiscal Year 2017-18	Production (Acre-Feet)
Zone A	Acin Farms	1,684
	Espinoza / Big E Produce (also in Zone B)	1,331
	SYRWCD, ID #1 (also in Zone E)	1,094
	City of Buellton (also in Zone D)	800
	Jackson, Palmer (The Alisal)	640
	Rancho LaVina	536
	Wygod, Martin (River Edge & Anvil Farms)	527
	Sea Smoke, Rita's Crown & Southing Holdings	470
	City of Solvang (also in Zones C and E)	263
	Campbell Ranches (also in Zones B, D and F)	154
	Williams, Norman (also in Zone D)	69
	Gainey Ranch / LTC Rancho Sanja Cota (also Zone E)	67
Zone B	Santa Barbara Farms (Witt/Guerra)	4,652
	City of Lompoc (Parks Dept. & Water Div.)	4,472
	Lompoc Farming	3,612
	Espinoza / Big E Produce (also in Zone A)	3,542
	Campbell Ranches (also in Zones A, D and F)	1,621
	Vandenberg Village CSD	1,380
	U.S. Penitentiary Farm	939
	Hibbits (Ranch and Family Trust)	637
	Mission Hills CSD	633
	Wineman, Edward	431
	Bodger & Sons Company	127
Zone C	Imerys (was Celite Corporation)	751
	City of Solvang (also in Zone A and E)	300
Zone D	Buell, James (incl. Marcelino, LLC)	967
	Foley Estates Vineyards (also in Zone F)	371
	City of Buellton (also in Zone A)	319
	Williams, Norman (also in Zone A)	288
	Campbell Ranches (also in Zones A, B and F)	43
Zone E	SYRWCD, ID #1 (also in Zone A)	1,361
	City of Solvang (also in Zones A and C)	69
Zone F	Campbell Ranches (also in Zones A, B and D) <sup>1</sup>	509
	Oak Hills Ranch (was A & M Farms)	405
	Foley Estates Vineyards (also in Zone D)	384

# ANNUAL GROUNDWATER PRODUCTION WITHIN THE DISTRICT 5-YEAR MOVING AVERAGE



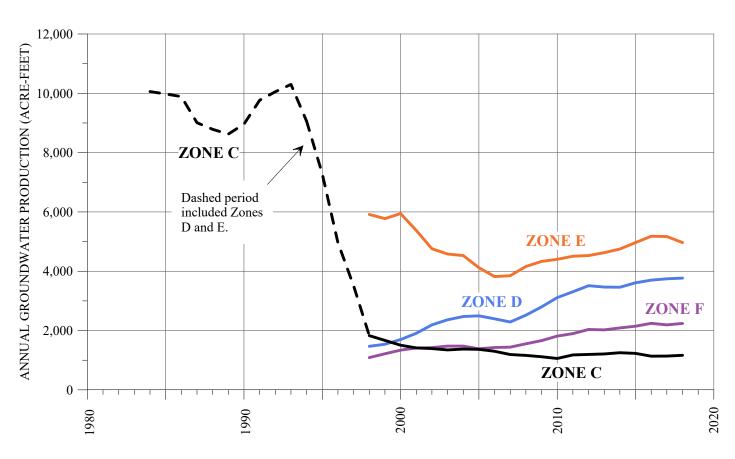

### 3.0 PRECIPITATION

Water supply and water use within the District as well as groundwater conditions are dependent upon precipitation. Precipitation, either directly or as streamflow infiltration, recharges the groundwater supplies. The quantity and timing of precipitation can provide an indication of future water-level conditions. Table 2 presents the monthly precipitation and departure from normal for two stations, Cachuma Lake and Lompoc, for the period January 2018 through March 2019. Precipitation during the current hydrologic water year to date (October 2018 through March 2019) is 117 and 132 percent of normal at Cachuma Lake and Lompoc, respectively.

The long-term annual variation in precipitation at Santa Barbara, Gibraltar Dam, Cachuma Lake, and Lompoc is shown graphically on Figure 4. Also shown on Figure 4 is a graph of the accumulated departure from the mean annual precipitation. The analysis represented by these graphs indicates the historical wet and dry periods. A wet period is indicated by an upward trend of the graph over a period of years. Conversely, where the graph trends downward over a period of years a dry period is indicated.

TABLE 2
MONTHLY PRECIPITATION AND DEPARTURE
FROM NORMAL AT CACHUMA LAKE AND LOMPOC
JANUARY 2018 THROUGH MARCH 2019 a


(Inches)

	Cachum	na Lake	Lompoc				
Month							
	Precipitation	Departure <sup>b</sup>	Precipitation	Departure <sup>b</sup>			
January 2018	3.60	-1.34	2.16	-1.17			
February	0.18	-5.00	0.16	-3.43			
March	5.09	1.16	5.52	2.64			
April	0.13	-1.30	0.29	-0.72			
May	0.46	0.00	0.01				
June	0.00	-0.05	0.01	-0.03			
July	0.00	-0.01	0.00	-0.01			
August	0.00	-0.03	0.00	-0.03			
September	0.00	-0.13	0.00	-0.10			
October	1.02	0.03	0.83	0.09			
November	2.50	0.92	1.73	0.32			
December	0.36	-3.00	1.34	-1.22			
2018 Total	13.34	-8.75	12.05	-3.94			
Percent of Normal	60		75				
January 2019	7.54	2.60	6.15	2.82			
February	8.05	2.87	6.43	2.84			
March	3.90	-0.03	2.61	-0.27			
2018-19 Hydrologic Water Year Total							
Through March	23.37		19.09				
Percent of Normal	117		132				

<sup>&</sup>lt;sup>a</sup> Data from Santa Barbara County Flood Control District

<sup>&</sup>lt;sup>b</sup> Departure from normal is based on an averaging period of 1981 to 2010 as established by the National Oceanic and Atmospheric Administration (NOAA).

#### ANNUAL PRECIPITATION AND CUMULATIVE DEPARTURE FROM MEAN FOR LOMPOC, SANTA BARBARA, CACHUMA LAKE, AND GIBRALTAR DAM

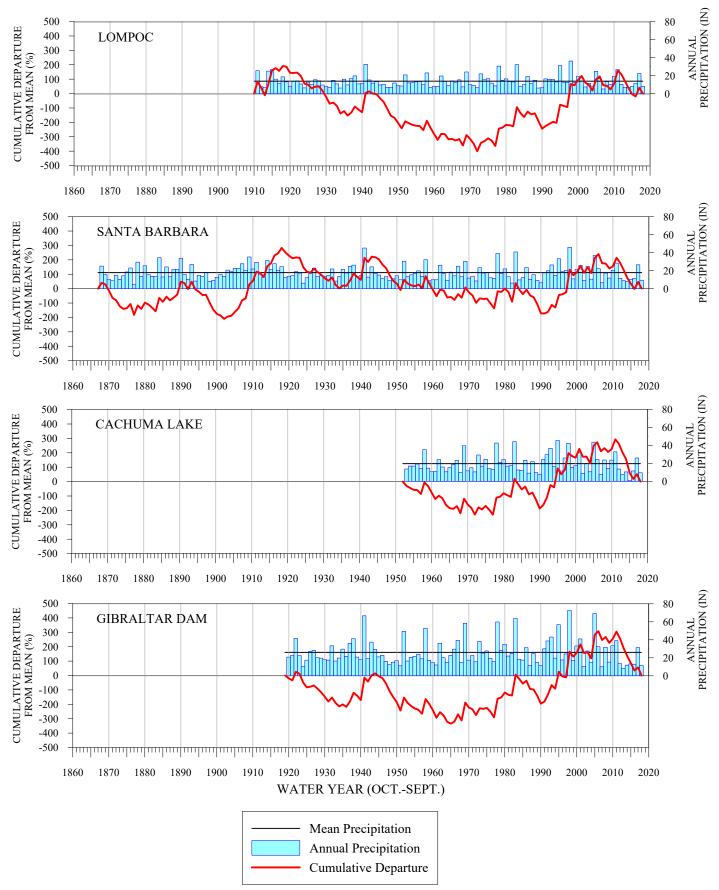

#### 4.0 SURFACE WATER CONDITIONS

Surface water supplies potentially available in the watershed include the main stem and tributaries of the Santa Ynez River and imported water from northern California through the State Water Project (SWP). As mentioned in Chapter 1, upstream diversion works constructed on the river system by South County interests and the Federal Government were designed to export all or most of the diverted water out of the watershed. These diversion facilities include Juncal Dam (Jameson Reservoir), Doulton Tunnel, and Fox and Alder Creeks by the Montecito Water District, Gibraltar Dam (Gibraltar Reservoir), Mission Tunnel, and Devil's Canyon by the City of Santa Barbara, and Bradbury Dam (Cachuma Reservoir), and Tecolote Tunnel by the U.S. Bureau of Reclamation (USBR). Drainage areas upstream of these diversion dams are approximately 14 (Juncal), 216 (Gibraltar), and 417 (Bradbury) square miles with the latter representing about 47 percent of the total watershed. These diversions significantly affect recharge to the groundwater in the River alluvial aquifer and the Lompoc Plain groundwater subarea.

The Cachuma Project is by far the largest of the upstream diversion facilities with a reservoir capacity of 184,121 acre-feet at water surface elevation of 750 feet (December 2013 survey) and annual operational yield of 25,714 acre-feet. The annual operations of this Project, from its start in 1952 through hydraulic water year 2017-18, are summarized in Table 3.

#### 4.1. BASIN SURFACE WATER USE

This District contracted with the USBR through the Santa Barbara County Water Agency for 10.3 percent of the annual Cachuma Project yield and established the Improvement District No. 1 (ID No. 1) to distribute and serve municipal and irrigation water in the Santa Ynez Valley. The service area of ID No. 1 is roughly bordered by the towns of Santa Ynez, Los Olivos and Solvang. ID No. 1 became essentially a separate entity and later this District assigned its Cachuma entitlement to ID No.1. ID No. 1 later exchanged this water (approximately 2,600 acre-feet) for treated SWP water with the other (South Coast) Cachuma Member Units. ID No. 1 continues to use a small portion of its Cachuma

TABLE 3
SUMMARY OF CACHUMA PROJECT OPERATIONS
1952-53 THROUGH 2017-18 a

					(Tiere Teet,	,					
	[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]	[9] SYRWCD	[10]	[11]
Water	Lake Cachuma	Computed	CCWA	Precipitation	Reservoir	Estimated	Diversion	Park	ID No.1	Downstream	Fish Water
Year <sup>b</sup>	End-of-Year Storage	Inflow		on Reservoir	Evaporation	Spill	to Tunnel	Diversions	Deliveries	Release <sup>c</sup>	Release
I Gai	Lilu-oi-Teal Stolage	IIIIOW		OH INESERVOII	Lvaporation	Орііі	to runner	Diversions	Deliveries	Neicase	Neicase
1952-53	9,188	17,942		106	1,319	0				7,541	
1953-54	21,779	18,955		598	2,327	0				4,635	
1954-55	19,584	4,941		936	2,540	0				3,922	
		•			·					·	
1955-56	36,629	24,330		1,482	4,200	0	2,118			2,449	
1956-57	30,154	6,150		1,162	4,642	0	5,470			3,674	
1957-58	196,889	219,129		4,459	11,210	35,738	4,850			5,050	
1958-59	187,178	15,068		3,629	14,624	3,056	8,432			2,296	
1959-60	163,149	2,643		2,669	13,613	0	11,410	169	300	3,849	
1960-61	134,493	795		2,382	12,015	0	17,309	662	239	1,608	
1961-62	190,475	100,134		4,963	12,446	21,822	11,921	402	890	1,633	
1962-63	171,736	4,270		3,788	12,157	0	10,595	510	694	2,843	
1963-64	141,506	2,439		2,378	11,786	0	17,352	447	1,504	3,958	
1964-65	122,308	12,314		3,043	10,204	0	14,909	182	1,837	7,423	
	•	,			,					,	
1965-66	168,926	79,292		3,707	12,524	0	17,522	345	2,129	3,862	
1966-67	191,622	208,961		5,774	12,683	153,823	14,155	246	2,575	8,557	
1967-68	160,871	10,404		2,414	13,524	0	18,199	357	3,669	7,820	
1968-69	190,181	525,370		9,727	12,305	472,411	15,031	240	2,597	3,199	
1969-70	176,407	28,740		1,793	13,525	0	21,448	335	4,115	4,888	
1970-71	161,345	31,045		3,497	12,308	0	22,800	357	3,115	11,028	
1971-72	121,314	8,754		2,231	11,452	0	28,158	167	4,469	6,769	
1972-73	185,591	125,804		5,948	12,056	29,300	18,456	129	3,552	3,982	
1973-74	182,039	33,670		4,112	12,677	5,655	17,805	138	3,469	1,590	
1974-75	184,467	50,544		5,867	11,866	16,804	20,854	128	3,057	1,275	
1975-76	145,187	5,310		3,189	11,804	0	26,020	148	4,655	5,152	
1976-77	112,077	1,520		2,601	10,775	0	18,740	98	4,583	3,035	
1977-78	193,424	329,219		9,573	13,535	219,295	20,701	114	3,011	790	
1978-79	183,949	61,692		5,250	13,917	36,385	20,102	147	4,029	1,837	
1979-80	187,382	153,543		6,003	13,353	116,915	22,057	139	2,483	1,166	
1980-81	168,871	22,066		4,019	13,811	0	20,856	178	5,007	4,743	
1981-82	159,528	26,848		3,868	11,479	0	20,956	187	2,963	4,474	
1982-83	196,347	428,601		10,995	12,630	361,675	22,616	183	1,532	4,142	
1983-84	171,599	39,074		3,354	14,534	17,217	25,601	193	5,054	4,577	
1984-85	135,748	5,057		2,816	12,275	0	22,781	142	2,664	5,862	
1985-86	171,873	76,571		4,831	12,782	0	21,690	108	2,686	8,010	
1986-87	128,352	2,374		1,996	12,147	0	27,209	150	3,812	4,573	
1987-88	99,150	8,732		4,092	10,293	0	23,917	102	2,803	4,911	
1988-89	66,098	4,044		1,459	8,366	0	20,632	86	2,802	6,670	
1989-90	34,188	2,627		909	6,019	0	16,384	66	863	4,792	
					- 18 -						

### TABLE 3 – CONTINUED SUMMARY OF CACHUMA PROJECT OPERATIONS 1952-53 THROUGH 2017-18 a

(Acre-Feet)

Water	[1] Lake Cachuma	[2] Computed	[3] CCWA	[4] Precipitation	[5] Reservoir	[6] Estimated	[7] Diversion	[8] Park	[9] ID No.1	[10] Downstream	[11] Fish Water
Year <sup>b</sup>	End-of-Year Storage	Inflow		on Reservoir	Evaporation	Spill	to Tunnel	Diversions	Deliveries	Release <sup>c</sup>	Release
1990-91	60,995	53,566		2,057	6,373	0	15,762	43	1,656	4,983	
1991-92	157,066	135,828		4,022	11,239	0	18,170	52	891	13,427	
1992-93	177,479	333,387		8,875	13,428	280,698	22,582	79	2,042	1,591	1,429
1993-94	151,046	16,729		4,144	12,561	200,090	22,821	73	1,819	9,537	494
1994-95	134,855	365,092		10,063	10,321	354,402	23,887	64	1,619	1,823	740
1994-95	134,000	365,092		10,063	10,321	354,402	23,007	04	109	1,023	740
1995-96	120,503	33,243		2,653	11,627	0	24,721	76	2,109	9,703	2,012
1996-97	124,771	56,552	148	2,911	11,861	0	26,785	83	1,785	13,205	1,623
1997-98	185,500	475,175	1354	12,071	11,350	386,055	24,473	60	0	3,956	1,976
1998-99	168,772	21,562	323	4,077	12,341	0	26,397	70	0	883	2,999
1999-00	170,840	51,895	2156	4,972	12,435	6,067	30,365	79	0	5,972	2,037
2000-01	173,479	152,773	818	7,712	11,995	112,313	26,089	78	0	3,502	2,157
2001-02	129,370	5,508	4,627	2,040	11,004	0	30,976	90	0	11,961	2,253
2002-03	115,449	18,822	6,816	3,707	9,402	0	28,781	99	0	2,292	2,691
2003-04	71,378	5,750	5,924	1,782	8,829	0	32,269	83	0	14,217	2,131
2004-05	179,997	401,755	3,137	8,365	11,763	260,078	26,796	62	0	2,894	3,045
2004 00	170,007	401,700	0,107	0,000	11,700	200,070	20,700	02	· ·	2,004	0,040
2005-06	180,203	100,562	1,014	6,075	12,354	62,869	24,119	66	0	0	8,037
2006-07	132,392	4,348	5,204	1,716	11,940	0	32,797	83	0	9,327	4,932
2007-08	173,280	109,536	4,701	4,712	13,449	22,994	32,591	63	0	2,274	6,689
2008-09	142,479	13,218	2,602	3,112	12,220	0	27,634	82	0	0	8,688
2009-10	152,855	56,628	1,736	5,057	11,374	0	27,259	73	0	7,165	7,175
2010-11	180,986	151,343	1,258	7,226	11,871	85,755	26,866	79	0	1,481	5,642
2011-12	142,970	6,005	408	2,959	11,724	0	28,682	79	0	0	6,904
2012-13	91,922	2,982	2,101	1,497	9,943	0	31,039	76	0	12,613	3,956
2013-14	61,107	3,947	11,522	1,367	8,441	0	29,023	34	0	7,561	2,591
2014-15	32,989	4,006	8,316	1,074	7,443	0	17,137	25	0	12,600	2,156
2045 42	44.000	4.007	40.000	000	E 444	0	45.004	0.4	0	44.000	4.050
2015-16	14,222	4,697	10,220	860	5,444	0	15,604	24	0	11,620	1,853
2016-17	82,459	87,508	14,073	2,196	11,352	0	14,451	25	0	8,612	807
2017-18	61,273	4,910	13,308	1,269	7,730	0	18,681	23	0	11,654	2,584
Average <sup>d</sup>	134,428	81,459	4,626	3,942	10,872	46,384	21,203	147	1,654	5,355	3,369

<sup>&</sup>lt;sup>a</sup> Source of Information: U.S. Bureau of Reclamation.

Water Balance Equation: [1] End of WY Storage = [1] Start of WY Storage + [2] + [3] + [4] - [5] - [6] - [7] - [8] - [9] - [10] - [11]

Water Balance Equation does not balance at the end of Water Year 1955, 1990, 2001, 2009, and 2015. New reservoir capacity tables were developed during these years and as a result, the storage capacity was reduced. The amount of unaccounted water equals the reduction in storage volume. End of WY2017 storage corrected by 293 AF due to gage reading

<sup>&</sup>lt;sup>b</sup> October 1 through September 30.

<sup>&</sup>lt;sup>c</sup> Includes leakage and water rights releases

<sup>&</sup>lt;sup>d</sup> For period of record

entitlement water to serve the County Park at Lake Cachuma. Table 3 shows annual deliveries of Cachuma Project water to ID No. 1 prior to the exchange and direct diversions from the reservoir for the County Park.

Alisal Reservoir was constructed by the Petan Company on Alisal Creek about three miles south of Solvang at the southern boundary of the District. The Permit issued by the State Water Resources Control Board (SWRCB) in 1969 allows for the diversion and storage of 2,342 acre-feet per year for irrigation, stock watering, domestic and recreational uses. Actual water use for this reservoir has not been quantified.

The District acquired Permit No. 17447 in 1978, which allowed for the diversion of up to 40 thousand acre-feet per year of winter flow from the Santa Ynez River near Lompoc. Earthen dams were constructed and maintained in the River for several years. When the District petitioned the SWRCB for an Extension of Time to further develop its rights under the Permit, the SWRCB placed the Permit in abeyance for many years, only to request a revised Petition for Extension of Time in 2001. The District filed the Time Extension Petition, as well as a Petition for Change at that time. There followed a decade of studies of various alternative designs and locations for an off-channel spreading facility, which was environmentally superior to the earlier project design. In 2014, when it became clear that the project was not feasible or cost-effective, the District, with concurrence by the City of Lompoc, requested the SWRCB to revoke the Permit.

#### 4.2. STATE WATER PROJECT WATER USE

Three water purveyors within the Santa Ynez Valley and one located partially in the Lompoc Valley have contracted for SWP water. Excluding drought buffers, the entities and their annual entitlements (in acre-feet) include: ID No. 1 (500); Solvang (1,500, contracted through ID No. 1); Buellton (578); and, Vandenberg AFB (5,500, located partly in the Lompoc Valley). SWP deliveries to these entities, as reported by the Central Coast Water Authority (CCWA), for the preceding fiscal year (2017-18) and the first half of the current fiscal year (2018-19) in acre-feet are as follows:

Fiscal Year (July-June)	ID No. 1 (Acre-Feet)	City of Solvang (Acre-Feet)	City of Buellton (Acre-Feet)	Vandenberg AFB (Acre-Feet)
2017-18	1,622	562	276	2,117
2018-19 (First Half)	700	345	70	1,230

Source: Central Coast Water Authority

Deliveries to ID No. 1 include entitlement, drought buffer entitlement, exchange, and (turnback pool) purchased water.

#### 4.3. RIVER SYSTEM FLOW CONDITIONS

Annual and monthly flows of the Santa Ynez River near Lompoc are summarized in Table 4 and shown as bar graphs in Figure 5. Annual flows of Salsipuedes Creek near Lompoc, a major tributary of the Santa Ynez River upstream of the Lompoc Narrows, are shown on Table 5. Flow records for additional streams in the Basin are included in Appendix C.

#### 4.4. WATER RIGHTS RELEASES

Water rights releases for users downstream of Cachuma Reservoir are set forth in the SWRCB Order of 1973 (WR 73-37), as amended in 1989 (WR 89-18). These releases are based on the establishment of two accounts, and accrual of credits (storing water) in Cachuma Reservoir for the above and below Narrows areas. Releases from the Above Narrows Account (ANA) are made at Bradbury Dam for the benefit of downstream water users between the dam and the Lompoc Narrows. Releases from the Below Narrows Account (BNA) are conveyed to the Narrows for the benefit of water users in the Lompoc Plain subarea. ANA releases are made to replenish the groundwater basin in the above Narrows area and combined releases of ANA and BNA are made to replenish the groundwater basin in the above and below Narrows areas.

TABLE 4
FLOW OF THE SANTA YNEZ RIVER AT THE LOMPOC NARROWS

Water Year		Water Year									
(OctSept.)	Flow	(OctSept.)	Flow								
		1925	7,300	1945	50,700	1965	4,980	1985	3,100	2005	431,420
		1926	90,100	1946	38,970	1966	29,240	1986	30,110	2006	87,730
		1927	152,000	1947	13,940	1967	161,700	1987	5,210	2007	6,864
1908	222,000	1928	30,800	1948	50	1968	5,700	1988	3,590	2008	72,553
1909	681,000	1929	9,770	1949	2,040	1969	617,700	1989	30	2009	3,743
1910	115,000	1930	5,780	1950	1,460	1970	8,500	1990	0	2010	31,900
1911	533,000	1931	2,390	1951	0	1971	7,420	1991	20,900	2011	135,294
1912	50,400	1932	142,000	1952	261,900	1972	3,180	1992	62,090	2012	5,635
1913	47,400	1933	17,700	1953	19,910	1973	80,770	1993	391,530	2013	4,032
1914	546,000	1934	24,170	1954	5,830	1974	20,400	1994	15,600	2014	4,484
1915	395,000	1935	56,830	1955	2,060	1975	61,860	1995	485,520	2015	46
1916	258,000	1936	40,830	1956	28,860	1976	3,980	1996	24,820	2016	2,310
1917	137,000	1937	209,000	1957	1,460	1977	270	1997	39,130	2017	31,918
1918	320,000	1938	352,400	1958	140,000	1978	391,600	1998	681,520	2018	4,812
1919	60,300	1939	32,960	1959	16,940	1979	70,200	1999	28,460	2019	38,228
										(through Mar)	
1920	43,500	1940	20,610	1960	1,570	1980	189,100	2000	51,850		
1921	16,800	1941	652,300	1961	330	1981	20,240	2001	250,425		
1922	190,500	1942	67,310	1962	87,890	1982	6,450	2002	9,530		
1923	23,000	1943	231,900	1963	9,520	1983	503,600	2003	15,730		
1924	5,300	1944	119,400	1964	0	1984	34,110	2004	6,710		

Average	105,970
(1908-2018)	
Average	81,850
(1953-2018)	

405.070

2019 flows do not include equipment failure January 14-17, likely totalling less than 400 Acre-Feet. Data from U.S. Geological Survey include periods of 1908 through 1918, 1926 though 1950, 1952 through 1963, and 1965 through March 2015.

Data from U.S. Bureau of Reclamation include periods of 1919 through 1925, 1951, and 1964.

#### MONTHLY SURFACE FLOW, SANTA YNEZ RIVER NEAR LOMPOC

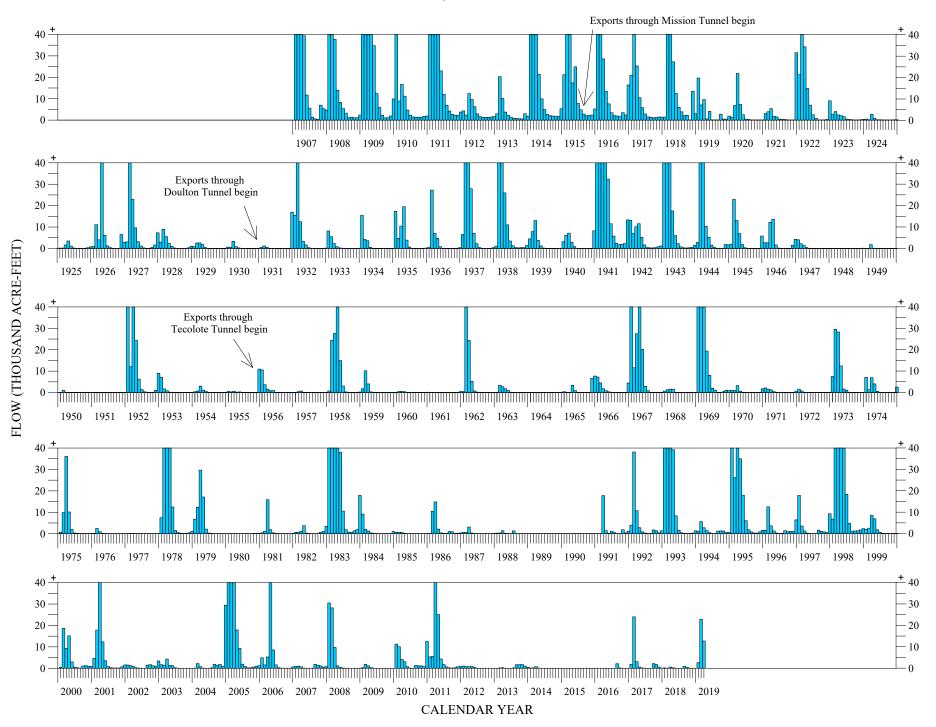


TABLE 5
FLOW OF SALSIPUEDES CREEK NEAR LOMPOC

Water Year (OctSept.)	Flow						
		1960	1,420	1980	14,980	2000	10,850
		1961	690	1981	5,060	2001	19,986
1942	10,650	1962	22,200	1982	1,610	2002	1,653
1943	10,710	1963	5,330	1983	36,850	2003	3,630
1944	8,870	1964	930	1984	3,360	2004	1,662
1945	2,270	1965	2,720	1985	1,170	2005	33,230
1946	1,790	1966	9,480	1986	10,290	2006	5,620
1947	870	1967	6,710	1987	1,610	2007	695
1948	400	1968	780	1988	890	2008	8,736
1949	1,710	1969	20,520	1989	210	2009	645
1950	1,280	1970	1,810	1990	130	2010	4,841
1951	320	1971	1,180	1991	4,420	2011	15,023
1952	16,870	1972	520	1992	6,690	2012	1,108
1953	4,630	1973	15,660	1993	17,030	2013	370
1954	2,410	1974	5,320	1994	2,750	2014	243
1955	1,320	1975	13,780	1995	58,360	2015	108
1956	15,610	1976	1,520	1996	3,610	2016	172
1957	1,250	1977	600	1997	5,480	2017	9,695
1958	23,570	1978	36,290	1998	41,180	2018	248
1959	2,620	1979	8,410	1999	6,160	2019	10,828
	ŕ		·		·	(through Mar)	·
						Average (1942-2018)	7,840
						Average (1953-2018)	8,300

Data from U.S. Geological Survey.

In calendar year 2018, water rights releases were made starting on August 6 to replenish the above and below Narrows. These releases extended through September 11 for a period of 37 days. The amounts of water released for groundwater replenishment, in acrefeet, are summarized below.

2018 Releases	Above Narrows Account (Acre-Feet)	Below Narrows Account (Acre-Feet)	Total (Acre-Feet)
August	6,297	938	7,235
September	309	510	819
Total	6,606	1,448	8,054

Source: U.S. Bureau of Reclamation

The rate, duration, and geographical extent of the above releases is shown in Appendix D. Historical water rights releases are summarized in Table 6.

TABLE 6
HISTORICAL WATER RIGHTS RELEASES

		Releases (Acre-Feet)		_	Releases (Acre-Feet)		
	Above Narrows	Below Narrows			Above Narrows	Below Narrows	
Calendar Year	Account (ANA)	Account (BNA)	Total	Calendar Year	Account (ANA)	Account (BNA)	Total
eleases under l	Live Stream			Releases under \	WR 89-18		
1953	-	-	7,540	1990	4,792	0	4,792
1954	-	-	4,632	1991	7,745	3,638	11,383
1955	-	-	3,921	1992	4,930	3,287	8,217
1956	-	-	2,449	1993	0	0	0
1957	-	-	3,674	1994	6,727	4,012	10,739
1958	-	-	4,142	1995	0	0	0
1959	-	-	1,294	1996	7,319	3,459	10,778
1960	-	-	3,411	1997	9,572	3,438	13,010
1961	-	-	1,365	1998	0	0	0
1962	-	-	380	1999	0	0	0
1963	-	-	2,239	2000	4,360	1,858	6,218
1964	-	-	3,665	2001	0	0	0
1965	-	-	7,251	2002	9,054	4,412	13,466
1966	-	-	6,860	2003	0	0	0
1967	-	-	3,274	2004	11,494	4,512	16,006
1968	-	-	6,705	2005	0	0	0
1969	-	-	1,499	2006	0	0	0
1970	-	-	6,100	2007	6,703	4,897	11,60
1971	-	-	8,095	2008	0	0	0
1972	-	-	6,320	2009	0	0	0
1973	-	-	1,245	2010	5,122	3,524	8,646
				2011	0	0	0
eleases under \	WR 73-37			2012	0	0	0
1974	1,353	0	1,353	2013	10,694	6,779	17,473
1975	1,134	0	1,134	2014	4,698	0	4,698
1976	4,237	0	4,237	2015	10,603	0	10,603
1977	2,299	0	2,299	2016	9,334	2,286	11,620
1978	62	0	62	2017	7,758	4,454	12,212
1979	1,200	0	1,200	2018	6,606	1,448	8,054
1980	0	0	0				
1981	4,175	0	4,175				
1982	6,655	755	7,410				
1983	0	0	0				
1984	3,162	0	3,162				
1985	5,686	0	5,686				
1986	5,317	1,780	7,097				
1987	3,887	0	3,887				
1988	5,050	1,283	6,333				
1989	5,192	0	5,192				

#### 4.5. STATE WATER CODE REQUIREMENTS

The Water Code requires the Board to estimate for the ensuing water year the amount of water necessary for surface distribution, the amount of water necessary for replenishment of groundwater supplies, and the amount of water the District is obligated by contract to purchase (Water Code Sections 75574 (h), (i) and (j)). The amount of water necessary for surface distribution would be that scheduled for delivery by ID No. 1, Solvang, Buellton, and Vandenberg AFB. As a part of State Water delivery schedules submitted by ID No. 1, Solvang, Buellton, and Vandenberg AFB, the following delivery requests are indicated for fiscal year 2018-19. However, the actual delivery amounts would vary depending on changes in the delivery schedule and availability of SWP water.

	Acre-Feet <sup>a</sup>
ID No. 1	292
City of Solvang	901
City of Buellton	424
Vandenberg AFB	2,643

<sup>&</sup>lt;sup>a</sup> Includes buffer.

In addition, ID No. 1 is scheduled to receive its Cachuma entitlement (approximately 2,600 acre-feet) subject to shortage reductions for surface distribution in fiscal year 2018-19. The District does not have any contracts to purchase surface water nor the facilities to divert Santa Ynez River and/or tributary flow.

#### 5.0 GROUNDWATER CONDITIONS

There are two general types of water-bearing deposits within the District. They are: (1) river channel deposits and younger alluvium present along the Santa Ynez River and beneath the Lompoc Plain; and (2) older unconsolidated deposits either underlying the younger alluvial deposits or filling basins generally not in hydrologic continuity with the Santa Ynez River and its associated alluvial deposits.

#### 5.1. SOURCES OF GROUNDWATER

The sources of groundwater comprising each of the District's zones are as follows:

Zone A - Santa Ynez River alluvial deposits

Santa Ynez subarea

Buellton subarea

Santa Rita subarea

Zone B - Lompoc Area

Lompoc Plain subarea

Lompoc Upland subarea

Lompoc Terrace subarea

Zone C - Miscellaneous unconsolidated deposits and consolidated rocks

Zone D - Buellton Upland subarea

Zone E - Santa Ynez Upland subarea

Zone F - Santa Rita Upland subarea

The locations of the major groundwater sources are shown on Figure 6. A general description of the hydrogeology of the various sources of groundwater within the District is included as Appendix E.

#### 5.2. GROUNDWATER LEVEL CHANGES

Water-level changes from Spring 2018 to Spring 2019 provide the best direct indication of groundwater conditions during the past year. The water-level changes in wells monitored by the Santa Barbara County Water Agency (SBCWA), USGS, and USBR are summarized for the Lompoc Plain, Lompoc Upland, Lompoc Terrace, Santa Rita Upland, Buellton Upland and Santa Ynez Upland subareas. In Tables 7 through 10 a 0.0 reading

indicates a change of less than 0.1 feet, while a dash is a null value meaning the change could not be quantified due to one or two years of missing data


Table 7 presents the water-level changes for eight wells quantified by the USBR and SBCWA in the forebay of the Lompoc Plain subarea and 30 additional wells quantified by the SBCWA in the central and western portions of the Lompoc Plain. In the forebay, water levels increased from Spring 2018 to Spring 2019 in five of the wells quantified, decreased in two wells, and one well was the same. The forebay well not quantified by SBCWA and USGS has been dry since March 2016, so the water level change at this location is unknown. The water levels increased over the past year in 27 of the 30 wells located in the central and western portion of the Lompoc Plain while declining in three wells. The hydrographs of three wells located in the Lompoc Plain subarea are shown on Figure F-1 (Appendix F).

Water-level changes over the past year are shown on Table 8 for seven wells quantified by the SBCWA in the Lompoc Upland subarea. The water levels declined from Spring 2018 to Spring 2019 in six of the wells quantified, and increased in one of the well. Hydrographs for five wells located in the Lompoc Upland subarea are shown in Figure F-2 (Appendix F). The water level in the only well measured in the Lompoc Terrace subarea increased 2.3 feet over the past year (Table 8 and Figure F-3, Appendix F).

Water levels increased over the past year in two of the three wells with two years of valid measurements in the Santa Rita Upland subarea (Table 9). A hydrograph of Well 7N/33W-27G1 is shown on Figure F-3 (Appendix F).


The change in water levels over the past year in four wells measured in the Buellton Upland subarea are also presented in Table 9. Water levels increased in three of the wells and declined in one well. The hydrograph of well 6N/31W-7F1 showing water-level elevations is included in Figure F-3 (Appendix F).

The change in water levels from Spring 2018 to Spring 2019 in 25 wells located in the Santa Ynez Upland subarea are shown in Table 10. Twelve of these wells are located within the District portion of the Santa Ynez Upland subarea. Within the District portion of the subarea, the water level was observed to be lower in seven of the wells, and higher in five of the twelve measured wells. Hydrographs of two wells located in the Santa Ynez Upland subarea are included as Figure F-4 (Appendix F).

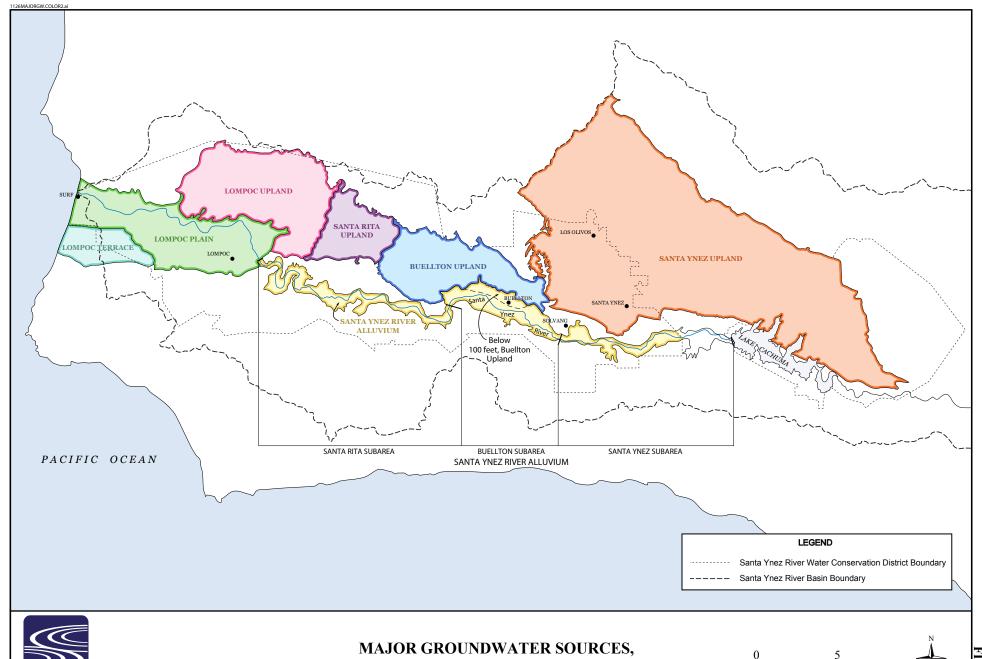



SANTA YNEZ RIVER BASIN





# TABLE 7 WATER-LEVEL CHANGES LOMPOC PLAIN SUBAREA 2018 TO 2019

#### Forebay a

#### Central and Western Plain b

Well No.	Water-Level Change (Feet)	Well No.	Water-Level Change (Feet)
6N/34W-4G4	3.9	6N/34W-6C4	9.8
7N/34W-22M6	-0.1	7N/34W-20K4	3.9
7N/34W-25F3	0.0	7N/34W-27G6	2.0
7N/34W-26B4	-1.3	7N/34W-29E4	4.0
7N/34W-26H3	b	7N/34W-29N6	4.0
7N/34W-26Q5	5.2	7N/34W-29N7	5.6
7N/34W-27F9	1.1	7N/34W-30L10	5.7
7N/34W-34R1	7.5	7N/34W-31R2	7.1
7N/34W-35K9	2.0	7N/34W-32H2	1.9
		7N/35W-15M1	0.3
		7N/35W-17M1	-2.5
		7N/35W-17K20	-2.8
		7N/35W-18J2	0.2
		7N/35W-21G2	
		7N/35W-22J1	4.1
		7N/35W-22M1	3.5
		7N/35W-23B2	0.8
		7N/35W-23Q2	2.5
		7N/35W-23Q3	6.4
		7N/35W-23Q4	6.7
		7N/35W-24J4	5.6
		7N/35W-24K5	4.8
		7N/35W-24N3	6.1
		7N/35W-25F6	1.6
		7N/35W-25F7	-1.8
		7N/35W-26F4	6.3
		7N/35W-26L1	3.0
		7N/35W-26L2	4.6
		7N/35W-26L4	7.2
		7N/35W-27C1	7.6
		7N/35W-35A3	4.1

-

<sup>&</sup>lt;sup>a</sup> Based upon measurements made during March by the U.S. Bureau of Reclamation.

<sup>&</sup>lt;sup>b</sup> Based upon measurements made during March and April by the Santa Barbara County Water Agency and USGS. Well 26H3 has been dry since 2016, so change in groundwater elevation could not be determined.

# TABLE 8 WATER-LEVEL CHANGES LOMPOC UPLAND AND LOMPOC TERRACE SUBAREAS 2018 TO 2019

#### **Lompoc Upland Subarea**

#### **Lompoc Terrace Subarea**

Well No.	Water-Level Change (Feet)	Well No.	Water-Level Change (Feet)
7N/33W-17M1	-1.1	7N/35W-27P1	2.3
7N/33W-17N2			
7N/33W-19D1	-0.4		
7N/33W-20G1			
7N/34W-12E1	-1.0		
7N/34W-14F4			
7N/34W-14L1	1.7		
7N/34W-15D3	-0.2		
7N/34W-15E1	-0.7		
7N/34W-15P2	-0.3		

Based upon measurements made during March and April by the Santa Barbara County Water Agency and USGS.

TABLE 9
WATER-LEVEL CHANGES
SANTA RITA AND BUELLTON UPLAND SUBAREAS
2018 TO 2019

#### Santa Rita Upland Subarea

#### **Buellton Upland Subarea**

	Water-Level Change		Water-Level Change
Well No.	(Feet)	Well No.	(Feet)
7N/33W-16G5		6N/31W-7F1	1.1
7N/33W-21G2	-2.3	6N/32W-2Q1	1.1
7N/33W-21N1	0.3	6N/32W-12K2	-3.0
7N/33W-27G1		7N/32W-31M1	
7N/33W-28D3	1.5	7N/33W-36J1	0.4

Based upon measurements made during March by the Santa Barbara County Water Agency and USGS.

# TABLE 10 WATER-LEVEL CHANGES SANTA YNEZ UPLAND SUBAREA 2018 TO 2019

#### **District Portion of Subarea**

#### **Non-District Portion of Subarea**

	Water-Level Change		Water-Level Change
Well No.	(Feet)	Well No.	(Feet)
6N/30W-7G5	0.2	6N/29W-5A1	
6N/30W-7G6	0.5	6N/29W-6F1	
6N/31W-1P2	-0.1	6N/29W-6G1	1.1
6N/31W-1P3	-0.2	6N/29W-7L1	6.1
6N/31W-2K1	0.3	6N/29W-8P1	-4.9
6N/31W-3A1	1.2	6N/29W-8P2	-5.6
6N/31W-4A1	-0.1	6N/30W-1R3	7.4
6N/31W-10F1	0.1	6N/30W-11G4	4.0
6N/31W-11D4	-1.7	7N/30W-16B1	-1.0
6N/31W-13D1	-0.1	7N/30W-19H1	-0.4
7N/31W-23P1	-9.3	7N/30W-22E1	-1.6
7N/31W-36L2	-3.4	7N/30W-24Q1	2.5
		7N/30W-27H1	
		7N/30W-29D1	2.2
		7N/30W-30M1	
		7N/30W-32R1	
		7N/30W-33M1	-0.2
		7N/30W-35R1	
		7N/31W-22A3	
		8N/30W-30R1	
		8N/31W-36H1	33.0

Based upon measurements made during March by the Santa Barbara County Water Agency and USGS.
Removed unmonitored well 7N/31W-35K4.

#### 5.3. STORAGE CHANGES

The general status of groundwater conditions of the District can be shown by estimates of change in groundwater storage of the major sources of groundwater within the District. The USBR, in connection with SWRCB Order No. 89-18, determines on a monthly basis the quantity of dewatered storage beneath the forebay on the Lompoc Plain and in the Santa Ynez River alluvial deposits. Under normal water supply conditions the Santa Ynez River alluvial deposits are replenished yearly. During extended drought periods, some shortages in supply may occur in these deposits.

In order to monitor the groundwater conditions of the District portions of the Lompoc Upland, Santa Ynez Upland, Lompoc Terrace, Santa Rita Upland and the eastern portion of the Buellton Upland, nodal systems for each source were established. The nodal systems are used to estimate the annual change in the quantity of groundwater in storage and overdraft.

Table 11 summarizes the estimated annual (Spring to Spring) change in groundwater storage in the alluvium of the Santa Ynez River for the past ten years, 2008-09 through 2017-18 and the current year, 2018-19. The change in groundwater storage is based upon the USBR's 25 node nodal system, which extends from Robinson Bridge near Lompoc to Bradbury Dam at Lake Cachuma. One node and a portion of another node lie outside the District, upstream of San Lucas Bridge. Changes in the groundwater storage in these nodes are reflected in the totals shown on Table 11 for the Santa Ynez subarea. Table 11 indicates that the accumulated dewatered storage at the end of March 2019 was about 15,300 acre-feet. As of March 31, 2018, the District had 11,657 acre-feet in the Above Narrows Account in Lake Cachuma.

Table 12 summarizes the estimated annual (Spring to Spring) change in groundwater storage in the Lompoc Plain subarea for the past ten years, 2008-09 through 2017-18 and the current year, 2018-19. Table 12 indicates that the accumulated dewatered storage at the end of March 2019 was 18,000 acre-feet. There was a gain in groundwater in storage in the Lompoc Plain subarea of 1,800 acre-feet during the past year. As of March 31, 2018, the District had 1,227 acre-feet of water in the Below Narrows Account in Lake Cachuma which could otherwise be considered groundwater in storage in the alluvium of the Lompoc Plain.

TABLE 11
ESTIMATED ANNUAL CHANGE IN GROUNDWATER STORAGE
IN THE SANTA YNEZ RIVER ALLUVIUM
FOR THE PAST TEN YEARS AND CURRENT YEAR (2018-19)

	Santa	Ynez Subarea	Bue	Ilton Subarea	Santa	Rita Subarea		al Santa Ynez ver Alluvium
Year (Spring to Spring)	Change in Storage	Accumulated Dewatered Storage	Change in Storage	Accumulated Dewatered Storage	Change in Storage	Accumulated Dewatered Storage	Change in Storage	Accumulated Dewatered Storage
2007-08		4,300		5,800		4,000		14,100
2008-09	100	4,200	-200	6,000	-700	4,700	-800	14,900
2009-10	300	3,900	100	5,900	700	4,000	1,100	13,800
2010-11	1,300	2,600	2,200	3,700	1,900	2,100	5,400	8,400
2011-12	-1,200	3,800	-2,100	5,800	-2,400	4,500	-5,700	14,100
2012-13	-300	4,100	-300	6,100	-1,900	6,400	-2,500	16,600
2013-14	-600	4,700	-300	6,400	1,300	5,100	400	16,200
2014-15	-800	5,500	-200	6,600	-3,500	8,600	-4,500	20,700
2015-16	500	5,000	-100	6,700	1,800	6,800	2,200	18,500
2016-17	1,400	3,600	600	6,100	3,600	3,200	5,600	12,900
2017-18	-1,000	4,600	-200	6,300	-2,500	5,700	-3,700	16,600
2018-19	600	4,000	-300	6,600	1,000	4,700	1,300	15,300

Based upon dewatered storage estimated by the U.S. Bureau of Reclamation (USBR). Values are rounded.

TABLE 12
ESTIMATED ANNUAL CHANGE IN GROUNDWATER STORAGE
IN THE LOMPOC PLAIN SUBAREA
FOR THE PAST TEN YEARS AND CURRENT YEAR (2018-19)
(Acre-Feet)

Year (Spring to Spring)	Change in Storage	Accumulated  Dewatered Storage
2007-08		11,500
2008-09	-2,100	13,600
2009-10	-300	13,900
2010-11	2,800	11,100
2011-12	200	10,900
2012-13	-4,200	15,100
2013-14	100	15,000
2014-15	-4,500	19,500
2015-16	-2,300	21,800
2016-17	1,100	20,700
2017-18	900	19,800
2018-19	1,800	18,000

Based upon dewatered storage estimated by the U.S. Bureau of Reclamation (USBR). Values are rounded.

The estimated annual change in groundwater storage beneath the Lompoc Upland and the Lompoc Terrace subareas, is shown on Table 13 for the past ten years, 2008-09 through 2017-18 and the current year, 2018-19. Table 13 indicates that during that 10-year period there has been a total decrease of 5,900 acre-feet in the quantity of groundwater in storage in the Lompoc Upland. During the current year, 2018-19, there has been a decrease of 200 acre-feet in storage. The estimated total dewatered storage in the Lompoc Upland subarea through Spring 2019 is 35,800 acre-feet. In the Lompoc Terrace during the current year, 2018-19, there has been an increase of 400 acre-feet in storage. The estimated dewatered storage in the Lompoc Terrace subarea through Spring 2019 is 600 acre-feet.

The estimated annual change in groundwater storage in the Santa Rita Upland subarea is shown on Table 14 for the past ten years, 2008-09 through 2017-18 and the current year. Table 14 indicates that during that 10-year period, there has been an decrease of 1,300 acrefeet in the quantity of groundwater in storage in the Santa Rita Upland subarea. During the current year, 2018-19, there has been an increase of 1,000 acre-feet in storage.

The estimated annual change in groundwater storage in the eastern portion of the Buellton Upland subarea (deeper aquifer in the Buellton area) is shown on Table 15 for the past ten years, 2008-09 through 2017-18 and the current year. Table 15 indicates that during that 10-year period, there has been a decrease of 100 acre-feet in the quantity of groundwater in storage. During the current year, 2018-19, there has been an increase in storage of 200 acre-feet.

The estimated annual change in groundwater storage within the District portion of the Santa Ynez Upland subarea is shown on Table 16 for the past ten years, 2008-09 through 2017-18 and for the current year. Table 16 indicates that during that 10-year period, there has been a decrease of about 23,300 acre-feet in the quantity of groundwater in storage in the District portion of the subarea. During the current year, 2018-19, there has been a decrease of quantity of water in storage of 1,800 acre-feet. The estimated total dewatered storage in the District portion of the subarea through Spring 2019 is 59,300 acre-feet.

TABLE 13
ESTIMATED ANNUAL CHANGE IN GROUNDWATER STORAGE
IN THE LOMPOC UPLAND AND LOMPOC TERRACE SUBAREAS
FOR THE PAST TEN YEARS AND CURRENT YEAR (2018-19)
(Acre-Feet)

	Lompoo	Upland Subarea	Lompoc	Terrace Subarea
Year		_		
(Spring to Spring)	Change in	Accumulated	Change in	Accumulated
	Storage	Dewatered Storage	Storage	Dewatered Storage
2007-08		29,700		100
2008-09	-500	30,200	0	100
2009-10	-700	30,900	0	100
2010-11	400	30,500	0	100
2011-12	-400	30,900	-100	200
2012-13	0	30,900	-100	300
2013-14	-1,400	32,300	-100	400
2014-15	-800	33,100	-200	600
2015-16	-400	33,500	-100	700
2016-17	-1,800	35,300	200	500
2017-18	-300	35,600	-500	1,000
2018-19	-200	35,800	400	600

The accumulated dewatered storage is based upon an estimate of existing dewatered storage of 25,500 acre-feet through 1973 from the Lompoc Upland subarea, and 800 acre-feet from the Lompoc Terrace subarea. The 1973 estimates were based upon review of water-level data and trends, and published USGS investigations.

TABLE 14
ESTIMATED ANNUAL CHANGE IN GROUNDWATER STORAGE
IN THE SANTA RITA UPLAND SUBAREA
FOR THE PAST TEN YEARS AND CURRENT YEAR (2018-19)
(Acre-Feet)

Year(Spring to Spring)	Change in Storage	Accumulated Dewatered Storage
2007-08		13,100
2008-09	1,200	11,900
2009-10	-1,000	12,900
2010-11	-1,700	14,600
2011-12	900	13,700
2012-13	100	13,600
2013-14	300	13,300
2014-15	-900	14,200
2015-16	400	13,800
2016-17	100	13,700
2017-18	-700	14,400
2018-19	1,000	13,400

The accumulated dewatered storage is based upon an estimate of existing dewatered storage of 7,400 acre-feet through 1973. The 1973 estimate was based upon review of water-level data and trends, and published USGS investigations.

TABLE 15
ESTIMATED ANNUAL CHANGE IN GROUNDWATER STORAGE
IN THE EASTERN PORTION OF THE BUELLTON UPLAND SUBAREA
FOR THE PAST TEN YEARS AND CURRENT YEAR (2018-19)

Year (Spring to Spring)	Change in Storage	Accumulated Dewatered Storage
2007-08		1,000
2008-09	-1,300	2,300
2009-10	300	2,000
2010-11	-1,200	3,200
2011-12	-200	3,400
2012-13	600	2,800
2013-14	-1,700	4,500
2014-15	700	3,800
2015-16	900	2,900
2016-17	100	2,800
2017-18	1,700	1,100
2018-19	-200	1,300

Accumulated dewatered storage was originally estimated as 2,000 acre-feet through 1973 based upon review of water-level data and trends and published USGS investigations. Recent (2006) water-level measurements indicated that the accumulated dewatered storage was more likely on the order of 2,400 acre-feet in 1973.

TABLE 16
ESTIMATED ANNUAL CHANGE IN GROUNDWATER STORAGE
IN THE DISTRICT PORTION OF THE SANTA YNEZ UPLAND SUBAREA
FOR THE PAST TEN YEARS AND CURRENT YEAR (2018-19)

Year(Spring to Spring)	Change in Storage	Accumulated Dewatered Storage
2007-08		34,200
2008-09	-2,800	37,000
2009-10	-1,100	38,100
2010-11	500	37,600
2011-12	-1,800	39,400
2012-13	-2,400	41,800
2013-14	-5,300	47,100
2014-15	-3,800	50,900
2015-16	-3,100	54,000
2016-17	-1,200	55,200
2017-18	-2,300	57,500
2018-19	-1,800	59,300

The accumulated dewatered storage is based upon an estimate of existing dewatered storage of 42,000 acre-feet through 1973. The 1973 estimate was based upon review of water-level data and trends, and published USGS investigations.

A summary of the annual change in storage for 2017 to 2018, 2018 to 2019, and the accumulated dewatered storage through 2017-18 and through 2018-19 are shown on Table 17 for the major sources of groundwater in the District.

#### 5.4. CHANGE IN STORAGE TRENDS

There has been a nearly continuous significant increase in dewatered storage since 2006 in the Santa Ynez Upland subarea. In the other groundwater subareas, as shown in Figure 7, there appears to be a gradual to no increase in the quantity of accumulated dewatered storage.

#### 5.5. SAFE YIELD

Table 18 shows estimates of average annual pumping safe yield of the principal sources of groundwater within the District for the immediate past ten years and for the current year. It is assumed that the specified safe yield values are applicable to both the current year and the immediate past ten years.

#### **5.6.** HISTORICAL PUMPAGE

Table 19 shows estimated reported average historical groundwater pumpage from the principal sources for groundwater within the District for the immediate past ten years (2008-09 through 2017-18).

#### 5.7. OVERDRAFT

For the District portion of each subarea, the average annual overdraft for the immediate past ten years and the estimated annual overdraft for the current (2018-19) and ensuing (2019-20) years is shown on Table 20. The information shown on Table 20 is based on estimates of change in the quantity of groundwater in storage. The values of overdraft were determined solely for the purpose of meeting the provisions in the California

TABLE 17
SUMMARY OF CHANGE IN QUANTITY OF
GROUNDWATER IN STORAGE WITHIN THE DISTRICT

	Change in	Storage <sup>a</sup>		Accumulated Dewatered Storage	
Source of Groundwater	2017-18	2018-19	2017-18	2018-19	
Santa Ynez River Alluvium	-3,700	1,300	16,600	15,300	
Lompoc Plain	900	1,800	19,800	18,000	
Lompoc Upland	-300	-200	35,600	35,800	
Lompoc Terrace	-500	400	1,000	600	
Santa Rita Upland	-700	1,000	14,400	13,400	
Buellton Upland (Eastern Portion)	1,700	-200	1,100	1,300	
Santa Ynez Upland (District Portion)	-2,300	-1,800	57,500	59,300	
TOTAL	-4,900	2,300	146,000	143,700	

<sup>&</sup>lt;sup>a</sup> Spring to Spring.

### TABLE 18 ESTIMATED AVERAGE SAFE YIELD OF PRINCIPAL SOURCES OF GROUNDWATER WITHIN THE DISTRICT


Source of Groundwater	Safe Yield (Acre-Feet per Year)
<u> </u>	(Note 1 det per 1 dai)
Santa Ynez River Alluvium	Subject to shortages during drought periods.
Lompoc Plain Subarea	24,100
Lompoc Upland Subarea	3,300
Lompoc Terrace Subarea	300
Santa Rita Upland Subarea	1,800
Buellton Upland Subarea <sup>a</sup>	2,800
Santa Ynez Upland Subarea <sup>a</sup>	9,800
Bedrock and other deposits	Unknown

#### Source:

Stetson Engineers, August 31, 1992, Santa Ynez River Water Conservation District, Water Resource Management Planning Process, Phase I: Baseline Data and Background Information

Estimated safe yield of entire subarea.
 Does not include return flow from imported water.

### ACCUMULATED DEWATERED STORAGE (2000 THROUGH 2019)

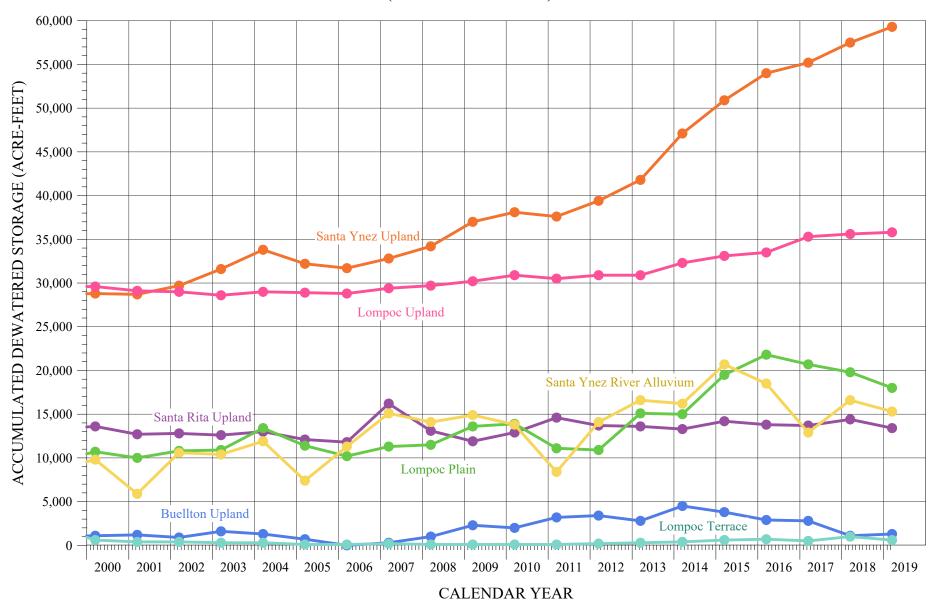

#### TABLE 19

## ESTIMATED AVERAGE ANNUAL HISTORICAL REPORTED GROUNDWATER PUMPAGE FROM THE PRINCIPAL SOURCES OF GROUNDWATER WITHIN THE DISTRICT

(Acre-Feet)

Source of Groundwater	Estimated Average Annual Pumpage for the Immediate Past Ten Years (2008-09 through 2017-18)
Zone A Santa Ynez River Alluvium	14,241
Zone B Lompoc Plain, Lompoc Upland, and Lompoc Terrace Subareas	25,929
Zone C All portions of the District not included in other zones	1,188
<b>Zone D</b> Buellton Upland Subarea	3,617
Zone E Santa Ynez Upland Subarea (District Portion)	4,796
Zone F Santa Rita Upland Subarea	2,133
DISTRICT TOTAL	51,904

## TABLE 20 AVERAGE ANNUAL OVERDRAFT OF PRINCIPAL SOURCES OF GROUNDWATER WITHIN THE DISTRICT

(Acre-Feet)

	Average Annual Overdraft for	Annual Overdraft	
Source of	the Immediate Past Ten Years	Estimated	Projected
Groundwater	(2008-09 through 2017-18)	2018-19	2019-20
Zone A			
Santa Ynez River Alluvium	250	0	0
Zone B			
Lompoc Plain Subarea	830	0	0
Lompoc Upland Subarea	590	200	200
Lompoc Terrace Subarea	90	0	0
Zone C			
Bedrock and other deposits	Unknown	Unknown	Unknown
Zone D			
Buellton Upland Subarea	10	200	200
(Eastern Portion)			
Zone E			
Santa Ynez Upland Subarea	2,330	1,800	1,800
(District Portion)			
Zone F			
Santa Rita Upland Subarea	130	0	0
DISTRICT TOTALS	4,230 ±	2,200 ±	2,200 ±

Overdraft is based upon annual estimates of change in groundwater storage.

Water Code pertaining to the implementation of a groundwater charge and do not necessarily represent the hydrologic status of the groundwater basin. The values of overdraft for the ensuing water year are assumed to be the same as for the current water year.

Estimates of accumulated overdraft based upon estimated groundwater storage depletions are shown on Table 21. As of March 31, 2019, there were 1,227 acre-feet of water in the Below Narrows Account in Lake Cachuma to off-set some of the accumulated overdraft in the alluvium of the Lompoc Plain and 11,657 acre-feet in the Above Narrows Account in Lake Cachuma to off-set the accumulated overdraft in the Santa Ynez River alluvium.

#### 5.8. GROUNDWATER QUALITY

High concentrations of dissolved solids in the upper aquifer of the Lompoc Plain along the coast have been attributed by the USGS to downward leakage of seawater from the overlying estuary. Graphs showing total dissolved solids, chloride and sodium concentrations of water from two wells located in the Lompoc Plain are presented on Figure 8. One of the wells (7N/35W-17K20) is located about one mile inland from the ocean. This well is situated in such a manner that it can be used to monitor sea water intrusion.


TABLE 21
ESTIMATED ACCUMULATED OVERDRAFT OF
PRINCIPAL SOURCES OF GROUNDWATER WITHIN THE DISTRICT
(Acre-Feet)


	Accumulated Overdraft		
Principal Source of Groundwater	Through Preceding Year (2017-18)	Through Current Year (2018-19)	
Zone A Santa Ynez River Alluvium (Subarea is replenished annually. Some shortages in supply during drought periods)	16,600	15,300	
Zone B Lompoc Plain Subarea Lompoc Upland Subarea Lompoc Terrace Subarea	19,800 35,600 1,000	18,000 35,800 600	
Zone C Bedrock and other deposits	Unknown	Unknown	
Zone D Buellton Upland Subarea (Eastern Portion)	1,100	1,300	
Zone E Santa Ynez Upland Subarea (District Portion)	57,500	59,300	
Zone F Santa Rita Upland Subarea	14,400	13,400	
DISTRICT TOTALS	146,000 ±	143,700 ±	


Accumulated overdraft is based upon estimates of accumulated dewatered storage (Table 17).

#### GRAPHS SHOWING TOTAL DISSOLVED SOLIDS, CHLORIDE AND SODIUM CONCENTRATIONS IN GROUNDWATER FROM SELECTED WELLS LOCATED IN THE LOMPOC PLAIN SUBAREA



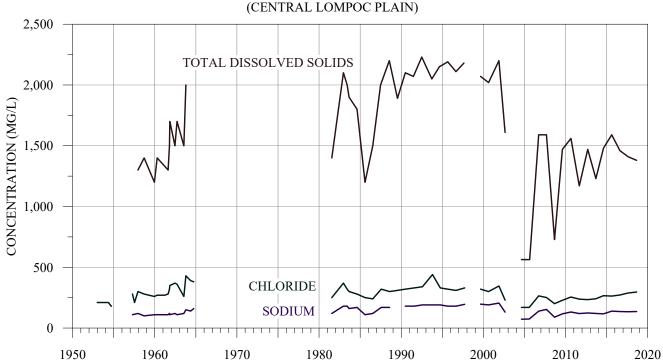



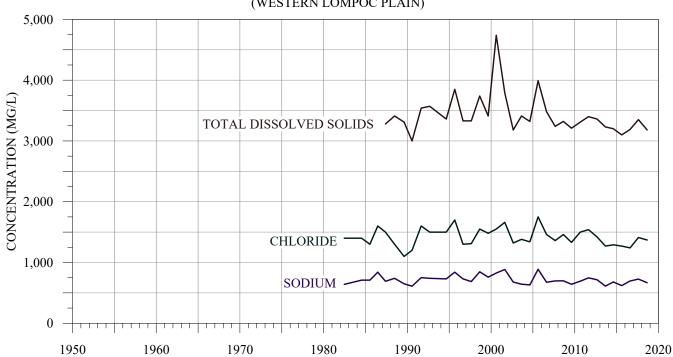

### Appendix A

# SUMMARY OF PROVISIONS IN THE CALIFORNIA WATER CODE PERTAINING TO THE IMPLEMENTATION OF A GROUNDWATER CHARGE

#### Appendix A

# SUMMARY OF PROVISIONS IN THE CALIFORNIA WATER CODE PERTAINING TO THE IMPLEMENTATION OF A GROUNDWATER CHARGE

Implementation of a groundwater charge within the District requires an engineering investigation report on the groundwater conditions of the District. The annual report requires that the following be included (Water Code Section 75560).

- 1. Information for the consideration of the Board in its determination of the annual overdraft:
- 2. Information for the consideration of the Board in its determination of the accumulated overdraft as of the last day of the preceding water year;
- 3. A report as to the total production of water from the groundwater supplies of the District for the preceding water year;
- 4. An estimate of the annual overdraft for the current water year and for the ensuing water year;
- 5. The amount of water the District is obligated to purchase during the ensuing water year, a recommendation as to the quantity of water needed for surface delivery and for replenishment of the groundwater supplies of the District for the ensuing year;
- 6. Such other information as the District desires.

The annual report should contain sufficient data from which the Board of Directors of the District can make the following determinations (Water Code Section 75574).

- 1. The average annual overdraft for the immediate past ten water years;
- 2. The estimated annual overdraft for the current water year;
- 3. The estimated annual overdraft for the ensuing water year;
- 4. The accumulated overdraft as of the last day of the preceding water year;
- 5. The estimated accumulated overdraft as of the last day of the current water year;
- 6. The estimated amount of agricultural water to be withdrawn from the groundwater supplies of the District for the ensuing water year;
- 7. The amount of water other than agricultural water to be withdrawn from the groundwater supplies of the District for the ensuing water year;

- 8. The estimated amount of water necessary for surface distribution for the ensuing water year;
- 9. The amount of water which is necessary for the replenishment of the groundwater supplies of the District;
- 10. The amount of water the District is obligated by contract to purchase.

Upon completion of the engineering report, the Board is required to call a noticed public hearing at which operators of water producing facilities within the District and any person interested in the condition of the groundwater or surface water supplies of the District are invited to submit evidence concerning the groundwater and surface water supplies of the District. The Board thereafter makes findings and determinations relating to the status of water supplies and groundwater conditions within the District. Prior to the beginning of the water year (July 1 to June 30), the Board determines whether or not it should modify the existing zone or zones in which a groundwater charge is levied.

The Board must then establish the groundwater charge to be levied in any zone or zones and proceed to assess such charge against all persons operating groundwater producing facilities within such zone or zones during the ensuing water year. The charge must be a fixed and uniform rate per acre-foot for agricultural water and for other water in each zone. Different rates may be established for different zones. Within any given zone, the fixed and uniform rate per acre-foot for other than agricultural water must be not less than three times nor more than five times the fixed and uniform rate established for agricultural water in that zone.

A 1984 amendment to the Water code established a rate for special irrigation water (irrigation water for parks, golf courses, cemeteries, schools and publicly owned historic sites). The rate shall not be less than the rate for agricultural water and shall not be more than the rate for non-agricultural water.

Within six months after establishing the existing zones within the District, all water-producing facilities located within the boundaries of the zones are required to be registered with the District. As new wells are drilled within the District, they must be registered. The District then annually gives notice to each operator of a water-producing facility of the groundwater charge for each acre-foot of water to be produced during the ensuing year.

Prior to January 31, and July 31, of each year, each water producer is required to file with the District a statement setting forth his total water production, in acre-feet, for the preceding six month period, excluding the month in which the statement is due, a general description or number locating each water-producing facility and the method or basis of the computation of such water production. This is to be a verified statement. The groundwater charge is payable to the District on or before the last date that the water production statement is due, January 31 and July 31.

# Appendix B HISTORICAL GROUNDWATER CHARGE RATES

## Appendix B

#### HISTORICAL GROUNDWATER CHARGE RATES

(Dollars per Acre-Foot)

Fiscal Year	Zone	Agri- cultural Water	Other Water	Special Irrigation Water	Fiscal Year	Zone	Agri- cultural Water	Other Water	Special Irrigation Water
		Trate.	114101				Truto.	···ato:	
1979-80	Zone A	0.60	2.40		1992-93	Zone A	2.20	8.80	4.40
	Zone B	0.62	2.48			Zone B	2.20	8.80	4.40
	Zone C	0.50	2.00			Zone C	2.00	8.00	4.00
1980-81	Zone A	0.60	2.40		1993-94	Zone A	3.80	15.20	7.60
	Zone B	0.62	2.48			Zone B	2.70	10.80	5.40
	Zone C	0.50	2.00			Zone C	2.30	9.20	4.60
						Zone D	2.90	11.60	5.80
1981-82	Zone A	0.45	1.80			Zone E	2.60	10.40	5.20
	Zone B	0.47	1.88			Zone F	2.50	10.00	5.00
	Zone C	0.35	1.40		1994-95	Zone A	4.89	17.10	9.77
1982-83	Zone A	0.60	2.40		1994-95	Zone B	2.74	9.58	5.47
1902-03	Zone B					Zone C			
	Zone C	0.42	1.68			Zone D	1.77	6.19	3.54
	Zone C	0.40	1.60				3.32	11.62	6.64
1002.04	Zone A	0.40	1.60			Zone E	2.40	8.41 11.59	4.80
1983-84		0.40	1.60			Zone F	3.31	11.59	6.62
	Zone B Zone C	0.22 0.20	0.88 0.80		1995-96	Zone A	3.08	10.78	6.16
	Zone C	0.20	0.60		1995-90	Zone B			
1984-85	Zone A	0.20	1.20				2.73	9.56	5.46
1984-85		0.30				Zone C	1.06	3.71	2.12
	Zone B	0.12	0.48			Zone D Zone E	3.77 3.68	13.20	7.54
	Zone C	0.10	0.40			Zone E Zone F	1.06	12.88 3.71	7.36 2.12
1985-86	Zone A	0.25	1.00	0.50					
	Zone B	0.10	0.40	0.20	1996-97	Zone A	3.85	13.48	7.70
	Zone C	0.08	0.32	0.16		Zone B	3.26	11.41	6.52
						Zone C	1.56	5.46	3.12
1986-87	Zone A	0.50	2.00	1.00		Zone D	3.70	12.95	7.40
	Zone B	0.35	1.40	0.70		Zone E	3.46	12.11	6.92
	Zone C	0.33	1.32	0.66		Zone F	1.56	5.46	3.12
1987-88	Zone A	0.50	2.00	1.00	1997-98	Zone A	3.85	13.48	7.70
	Zone B	0.35	1.40	0.70		Zone B	3.26	11.41	6.52
	Zone C	0.33	1.32	0.66		Zone C	1.56	5.46	3.12
						Zone D	3.70	12.95	7.40
1988-89	Zone A	0.60	2.40	1.20		Zone E	2.27	7.95	
	Zone B	0.50	2.00	1.00		Zone F	1.56	5.46	3.12
	Zone C	0.40	1.60	0.80	1998-99	Zone A	3.85	13.48	7.70
1989-90	Zone A	0.80	3.20	1.60	1550 55	Zone B	3.26	11.41	6.52
1909-90	Zone B	0.70	2.80	1.40		Zone C	1.56	5.46	3.12
	Zone C	0.60	2.40	1.20		Zone D	2.36	8.26	4.72
	20110-0	0.00	2.40	1.20		Zone E	1.56	5.46	3.12
1990-91	Zone A	1.00	4.00	2.00		Zone F	1.56	5.46	3.12
1000 01	Zone B	1.00	4.00	2.00		20110 1	1.00	0.40	0.12
	Zone C	0.80	3.20	1.60	1999-00	Zone A	3.80	13.30	7.60
	_50	3.00	5.20	1.00	.555 66	Zone B	3.26	11.41	6.52
1991-92	Zone A	1.00	4.00	2.00		Zone C	1.56	5.46	3.12
	Zone B	1.00	4.00	2.00		Zone D	1.56	5.46	3.12
	Zone C	0.80	3.20	1.60		Zone E	1.56	5.46	3.12
			2.20			Zone F	1.56	5.46	
								5. 10	J <u>_</u>

## Appendix B

#### HISTORICAL GROUNDWATER CHARGE RATES

(Dollars per Acre-Foot)

Fiscal Year	Zone	Agri- cultural Water	Other Water	Special Irrigation Water	Fiscal Year	Zone	Agri- cultural Water	Other Water	Special Irrigation Water
-		Water	Water	Water			mater	Trator	Trator
2000-01	Zone A	3.80	13.30	7.60	2007-08	Zone A	2.20	7.70	4.40
	Zone B	3.26	11.41	6.52		Zone B	2.20	7.70	4.40
	Zone C	1.56	5.46	3.12		Zone C	1.20	4.20	2.40
	Zone D	1.56	5.46	3.12		Zone D	1.20	4.20	2.40
	Zone E	1.56	5.46	3.12		Zone E	1.20	4.20	2.40
	Zone F	1.56	5.46	3.12		Zone F	1.20	4.20	2.40
2001-02	Zone A	3.50	12.25	7.00	2008-09	Zone A	2.20	7.70	4.40
	Zone B	3.26	11.41	6.52		Zone B	2.20	7.70	4.40
	Zone C	1.56	5.46	3.12		Zone C	1.20	4.20	2.40
	Zone D	1.56	5.46	3.12		Zone D	1.20	4.20	2.40
	Zone E	0.71	2.49	1.42		Zone E	1.20	4.20	2.40
	Zone F	1.56	5.46	3.12		Zone F	1.20	4.20	2.40
2002-03	Zone A	3.35	11.73	6.70	2009-10	Zone A	2.20	7.70	4.40
	Zone B	3.00	10.50	6.00		Zone B	2.20	7.70	4.40
	Zone C	1.40	4.90	2.80		Zone C	1.20	4.20	2.40
	Zone D	1.40	4.90	2.80		Zone D	1.20	4.20	2.40
	Zone E	0.60	2.10	1.20		Zone E	1.20	4.20	2.40
	Zone F	1.40	4.90	2.80		Zone F	1.20	4.20	2.40
2003-04	Zone A	3.20	11.20	6.40	2010-11	Zone A	2.55	8.93	5.10
	Zone B	2.85	9.98	5.70		Zone B	2.55	8.93	5.10
	Zone C	1.35	4.73	2.70		Zone C	1.40	4.90	2.80
	Zone D	1.35	4.73	2.70		Zone D	1.40	4.90	2.80
	Zone E	1.35	4.73	2.70		Zone E	1.40	4.90	2.80
	Zone F	1.35	4.73	2.70		Zone F	1.40	4.90	2.80
2004-05	Zone A	3.20	11.20	6.40	2011-12	Zone A	2.70	9.45	5.40
	Zone B	2.85	9.98	5.70		Zone B	2.70	9.45	5.40
	Zone C	1.35	4.73	2.70		Zone C	1.48	5.18	2.96
	Zone D	1.35	4.73	2.70		Zone D	1.48	5.18	2.96
	Zone E	1.35	4.73	2.70		Zone E	1.48	5.18	2.96
	Zone F	1.35	4.73	2.70		Zone F	1.48	5.18	2.96
2005-06	Zone A	2.20	7.70	4.40	2012-13	Zone A	3.00	10.50	6.00
	Zone B	2.20	7.70	4.40		Zone B	3.00	10.50	6.00
	Zone C	1.20	4.20			Zone C	1.65	5.78	3.30
	Zone D	1.20	4.20			Zone D	1.65	5.78	3.30
	Zone E	1.20	4.20			Zone E	1.65	5.78	3.30
	Zone F	1.20	4.20	2.40		Zone F	1.65	5.78	3.30
2006-07	Zone A	2.20	7.70	4.40	2013-14	Zone A	3.25	11.40	6.50
	Zone B	2.20	7.70			Zone B	3.25	11.40	6.50
	Zone C	1.20	4.20			Zone C	1.80	6.30	3.60
	Zone D	1.20	4.20			Zone D	1.80	6.30	3.60
	Zone E	1.20	4.20			Zone E	1.80	6.30	3.60
	Zone F	1.20	4.20	2.40		Zone F	1.80	6.30	3.60

## Appendix B

# HISTORICAL GROUNDWATER CHARGE RATES (Dollars per Acre-Foot)

Fiscal		Agri-	Other	Special
Year	Zone	cultural		Irrigation
		Water	Water	Water
2014-15	Zone A	3.25	11.40	6.50
	Zone B	3.25	11.40	6.50
	Zone C	1.80	6.30	3.60
	Zone D	1.80	6.30	3.60
	Zone E	1.80	6.30	3.60
	Zone F	1.80	6.30	3.60
2015-16	Zone A	3.50	12.25	7.00
	Zone B	3.50	12.25	7.00
	Zone C	2.15	7.53	4.30
	Zone D	2.15	7.53	4.30
	Zone E	2.15	7.53	4.30
	Zone F	2.15	7.53	4.30
2016-17	Zone A	3.85	13.48	7.70
	Zone B	3.85	13.48	7.70
	Zone C	3.00	10.50	6.00
	Zone D	3.00	10.50	6.00
	Zone E	3.00	10.50	6.00
	Zone F	3.00	10.50	6.00
2017-18	Zone A	4.85	16.98	9.70
	Zone B	4.85	16.98	9.70
	Zone C	4.85	16.98	9.70
	Zone D	4.85	16.98	9.70
	Zone E	4.85	16.98	9.70
	Zone F	4.85	16.98	9.70
2018-19	Zone A	7.15	25.00	14.30
	Zone B	7.15	25.00	14.30
	Zone C	7.15	25.00	14.30
	Zone D	7.15	25.00	14.30
	Zone E	7.15	25.00	14.30
	Zone F	7.15	25.00	14.30

## Appendix C

# ADDITIONAL STREAMFLOW RECORDS SANTA YNEZ RIVER BASIN

## Appendix C

# ADDITIONAL STREAMFLOW RECORDS SANTA YNEZ RIVER BASIN

(Acre-Feet)

107	A1 5: :	B.41	0 : 5	(Acic-rect)	0 1 11	<b>-</b> •	0 : 11
	Alamo Pintado	Miguelito	Santa Cruz	Santa Ynez River at	Santa Ynez	Zaca Creek	Santa Ynez
Year	Creek near	Creek	Creek near	Jameson Lake near	River at	near	River below
(OctSept.)	Solvang	at Lompoc	Santa Ynez	Montecito (Net Inflow)	Solvang	Buellton	Gibraltar Dam
	<u> </u>	•		,	<u> </u>		
1942			8,250	2,490			19,170
1943			28,990	11,320			86,330
							44,990
1944			17,500	5,230			
1945			11,910	2,570			16,580
1946			6,600	3,550			18,600
1947			3,580	1,360	14,920		6,260
1948			346	258	2,400		24
1949			1,630	310	2,900		23
1950			2,700	498	3,220		38
.000			2,. 00		0,220		00
1951			340	100	1,490		41
1952			29,500	11,585	239,100		85,500
1953			4,250	614	13,430		7,990
1954			5,440	1,300	6,400		9,240
1955			1,890	312	4,200		84
1956			9,410	752	12,140		3,480
1957			2,100	533	3,350		71
1958			43,720	13,442	91,640		123,600
1959			3,880	1,201	10,350		4,500
1960			1,640	99	3,160		16
1061			167		COF		
1961			167	0.405	625		40.000
1962			20,520	6,425	49,080		46,260
1963			2,250	76	3,570		74
1964			663	377	1,060	1	53
1965			5,050	1,050	5,890	5	1,480
1966			11,730	8,091	16,930	11	65,320
1967			36,540	9,451	148,700	755	123,470
1968			3,580	1,005	5,190		1,400
1969			97,360	33,112	548,800	6,680	316,400
1970			6,250	1,903	4,410	19	13,610
1970			0,230	1,903	4,410	19	13,010
1971	4	173	7,170	2,302	9,450	6	19,490
	7						
1972	470	108	2,280	915	4,380	2	687
1973	173	1,740	19,910	13,835	48,100	611	69,780
1974	60	833	7,220	3,086	10,700	56	18,330
1975	107	1,640	8,570	3,529	34,490	122	26,270
1976	4	361	992	1,526	2,310	23	481
1977	6	124	587	342	1,010	11	162
1978	2,220	3,670	44,380	24,318	327,500	3,690	195,100
1979	89	1,100	13,040	5,358	54,350	185	34,550
1980	998					886	
1960	990	1,940	23,750	11,321	196,300	000	86,840
1001	167	016	E 1E0	1 617	10.600	349	4,870
1981	167	916	5,150	1,617	10,690	349	
1982	22	544	7,680	1,559	3,920		11,910
1983	4,510	5,770	54,410	22,594	511,200		236,500
	556	974	8,590	3,064	24,860		23,530
1984			2 020	688	2,680		24
1984 1985	390	687	2,920		•		
		687	2,920				
		687	14,180	9,090	12,300		56,160
1985 1986		687	14,180	9,090			
1985 1986 1987			14,180 1,040	9,090 652	1,850		70
1985 1986 1987 1988		511	14,180 1,040 3,430	9,090 652 2,335	1,850 4,120		
1985 1986 1987			14,180 1,040	9,090 652	1,850		70

### **Appendix C**

# ADDITIONAL STREAMFLOW RECORDS SANTA YNEZ RIVER BASIN

(Acre-Feet)

Water	Alamo Pintado	Miguelito	Santa Cruz	(Acre-Feet) Santa Ynez River at	Santa Ynez	Zaca Creek	Santa Ynez
vvalei Year	Creek near	Creek	Creek near	Jameson Lake near	River at	near	River below
(OctSept.)	Solvang	at Lompoc	Santa Ynez	Montecito (Net Inflow)	Solvang	Buellton	Gibraltar Dam
1991	1,080	855	14,030	5,738	12,360	588	31,100
1991	1,690	685	20,780	12,223	40,130	1,760	90,978
1992	1,090	1,710	60,660	28,170	364,090	1,760	217,980
1993		705	•	·	,		
1994	7.660		4,261	1,542	9,390	E 600	6,588
1995	7,660	9,960	46,454	43,537	533,900	5,600	236,032
1996	2,260	2,140	10,041	2,541	15,890	574	11,463
1997	1,658	677	14,867	2,951	152,940	1,658	29,935
1998	18,300	6,820	89,240	115,212	655,470	8,360	299,400
1999	2,710	1,104	5,450	1,088	10,950	261	6,170
2000	1,978	1,961	8,499	3,426		504	25,269
2001	3,093	1,659	20,266	13,632		1,720	65,659
2001	886	476	1,256	369	6,200	36	595
2002	350	622	5,522	1,369	7,710	47	3,844
2003	112	224	1,216	816	10,150	8	3,844
2004	3,707	2,194	50,508	21,630	373,548	2,143	212,452
2003	3,707	2,194	30,308	21,030	373,340	2,143	212,452
2006	716	745	16,207	7,752	96,498	321	57,011
2007	323	135	992	191	10,883	0	0
2008	987	371	24,813	4,686	49,594		68,518
2009	2	71	6,147	348	4,745	0	5,079
2010	159		14,411	2524	18,602	119	41,872
2011	733		27,316	5260	120,431	859	92,246
2012	0		3,061	191	4,860	0	18
2013	0		1,196		381	0	0
2014	0		1,112		0	0	0
2015	0		389		0	0	0
_0.0	ŭ		300		· ·	· ·	ŭ
2016	0		377		8,002	0	0
2017	463		20,212		18,652	626	44,664
2018	0		2,078		9,396	0	401

Zeros represent annual gaged totals of zero acre-feet. Blanks represent incomplete gaged records.

# Appendix D WATER RIGHTS RELEASES

### Appendix D

#### TABLE D-1 2018 WATER RIGHTS RELEASES THROUGH BRADBURY DAM OUTLET WORKS

(Start Time)	USBR Date of Record <sup>a</sup>	USBR Release	USBR Release	Notes
(Start Time)	(End Time)	acre-feet	cfs	Notes
8/6/2018 8:00	8/7/2018 8:00	333.8	168.3	First day
8/7/2018 8:00	8/8/2018 8:00	368.7	185.9	
8/8/2018 8:00	8/9/2018 8:00	353.5	178.2	
8/9/2018 8:00	8/10/2018 8:00	369.6	186.3	CCWA deliveries switched to penstock
8/10/2018 8:00	8/11/2018 8:00	364.8	183.9	
8/11/2018 8:00	8/12/2018 8:00	365.2	184.1	
8/12/2018 8:00	8/13/2018 8:00	366.4	184.7	
8/13/2018 8:00	8/14/2018 8:00	369.2	186.1	
8/14/2018 8:00	8/15/2018 8:00	364.2	183.6	
8/15/2018 8:00	8/16/2018 8:00	364.2	183.6	
8/16/2018 8:00	8/17/2018 8:00	363.6	183.3	
8/17/2018 8:00	8/18/2018 8:00	363.6	183.3	
8/18/2018 8:00	8/19/2018 8:00	361.2	182.1	
8/19/2018 8:00	8/20/2018 8:00	311.6	157.1	Changes in release: 185 to 140 cfs
8/20/2018 8:00	8/21/2018 8:00	322.4	162.5	
8/21/2018 8:00	8/22/2018 8:00	281.0	141.7	
8/22/2018 8:00	8/23/2018 8:00	226.1	114.0	Changes in release: 140 to 90 cfs
8/23/2018 8:00	8/24/2018 8:00	210.0	105.9	
8/24/2018 8:00	8/25/2018 8:00	193.9	97.8	
8/25/2018 8:00	8/26/2018 8:00	189.9	95.7	
8/26/2018 8:00	8/27/2018 8:00	172.9	87.2	
8/27/2018 8:00	8/28/2018 8:00	172.8	87.1	Changes in release: 90 to 55 cfs
8/28/2018 8:00	8/29/2018 8:00	163.8	82.6	
8/29/2018 8:00	8/30/2018 8:00	152.5	76.9	CCWA deliveries switched to Bypass thru spillway
8/30/2018 8:00	8/31/2018 8:00	130.4	65.7	
8/31/2018 8:00	9/1/2018 8:00	108.4	54.7	
9/1/2018 8:00	9/2/2018 8:00	105.4	53.1	
9/2/2018 8:00	9/3/2018 8:00	108.4	54.7	
9/3/2018 8:00	9/4/2018 8:00	105.3	53.1	
9/4/2018 8:00	9/5/2018 8:00	87.3	44.0	Changes in release: 55 to 35 cfs
9/5/2018 8:00	9/6/2018 8:00	67.3	33.9	
9/6/2018 8:00	9/7/2018 8:00	67.4	34.0	
9/7/2018 8:00	9/8/2018 8:00	67.4	34.0	
9/8/2018 8:00	9/9/2018 8:00	50.4	25.4	Start ramp down to fish flows on 9/8
9/9/2018 8:00	9/10/2018 8:00	30.4	15.3	•
9/10/2018 8:00	9/11/2018 8:00	18.4	9.3	
9/11/2018 8:00	9/12/2018 8:00	2.9	1.5	End WRR on 9/11; continue releases for fish at 5.2 cfs


Total Water Rights Releases

8,054 AF


(Aug 6 - Sep 11) a) USBR Date of Record is from 8:00AM previous day to 8:00AM current day.

<sup>\*</sup> USBR Date of Record is from 8:00AM of the previous day to 8:00AM of the current day.


SANTA YNEZ RIVER DOWNSTREAM WATER RIGHTS RELEASES DURING 2018

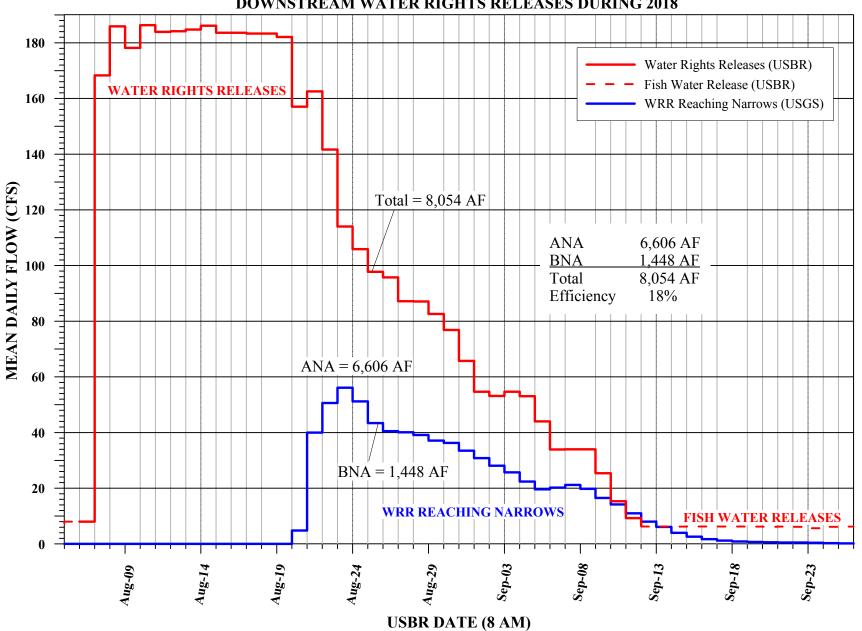

## STATE WATER PROJECT DELIVERIES AND DOWNSTREAM WATER RIGHTS RELEASES AT BRADBURY DAM DURING 2018

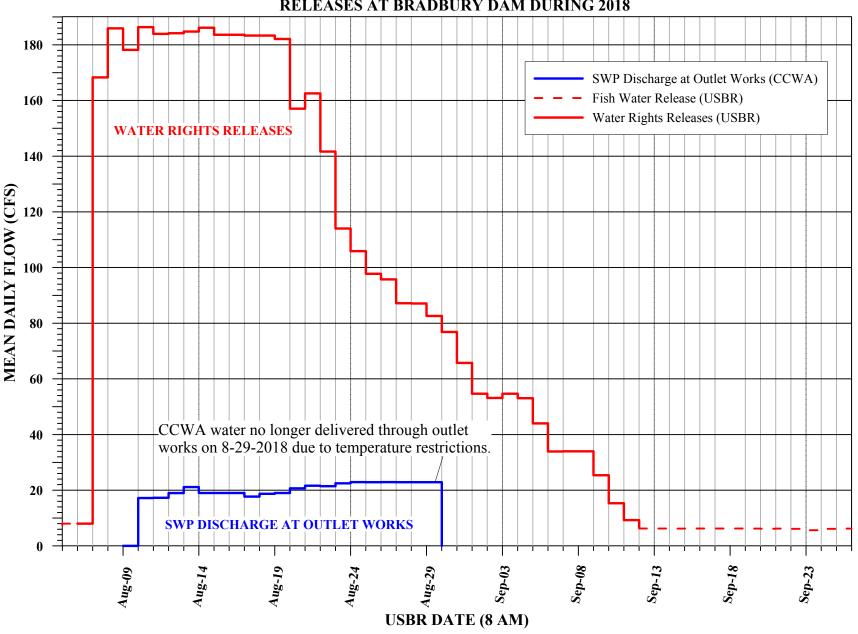



## PERCENTAGE OF STATE WATER PROJECT WATER IN WATER RIGHTS RELEASES DURING 2018

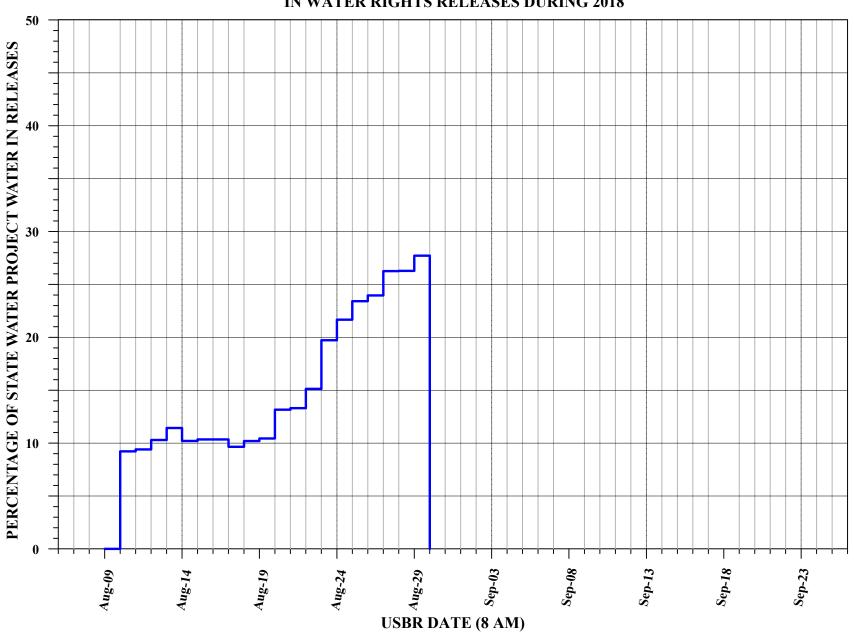



#### CACHUMA RELEASE AND WETTED FRONT **IN SANTA YNEZ RIVER DURING 2018**


August 6 - September 17, 2018

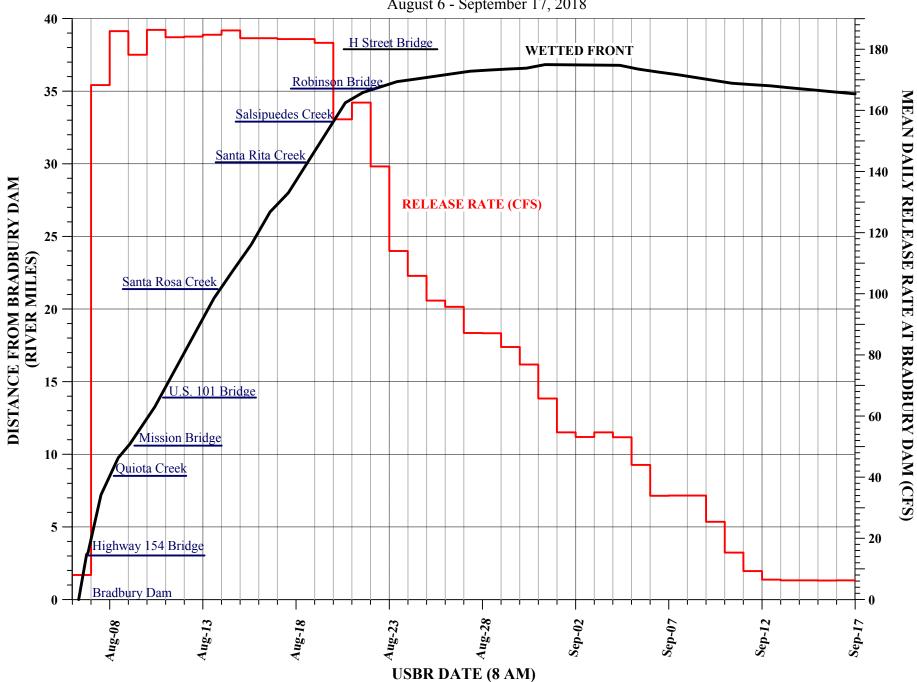

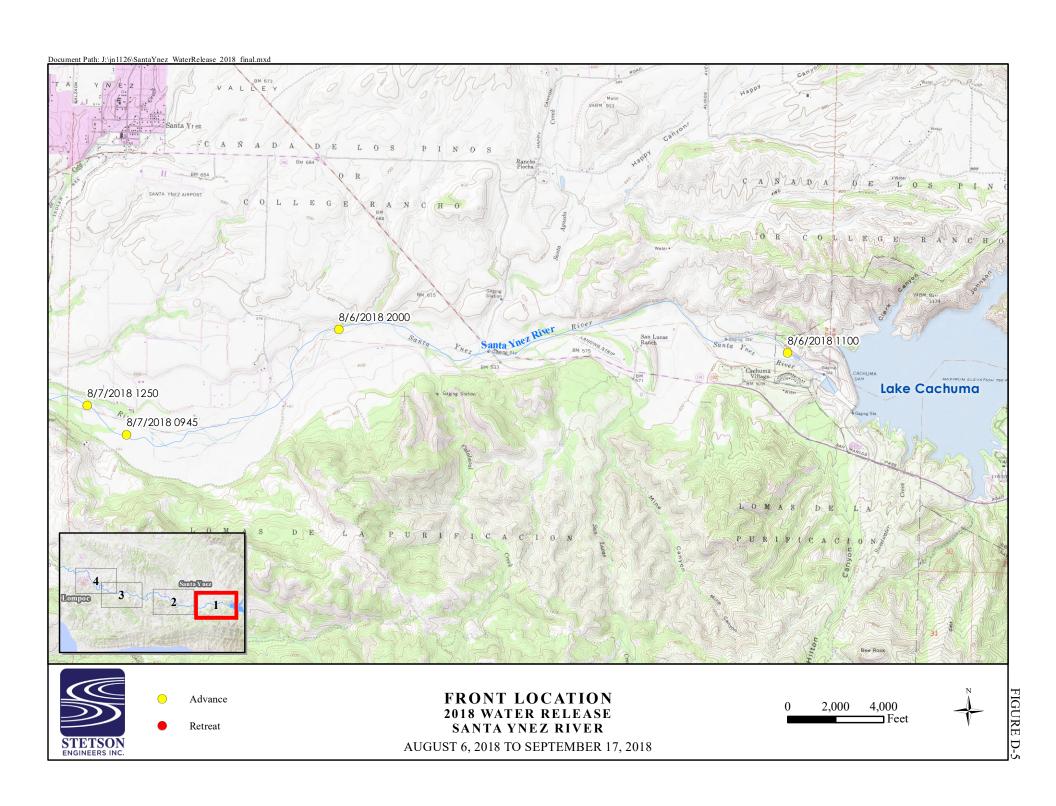

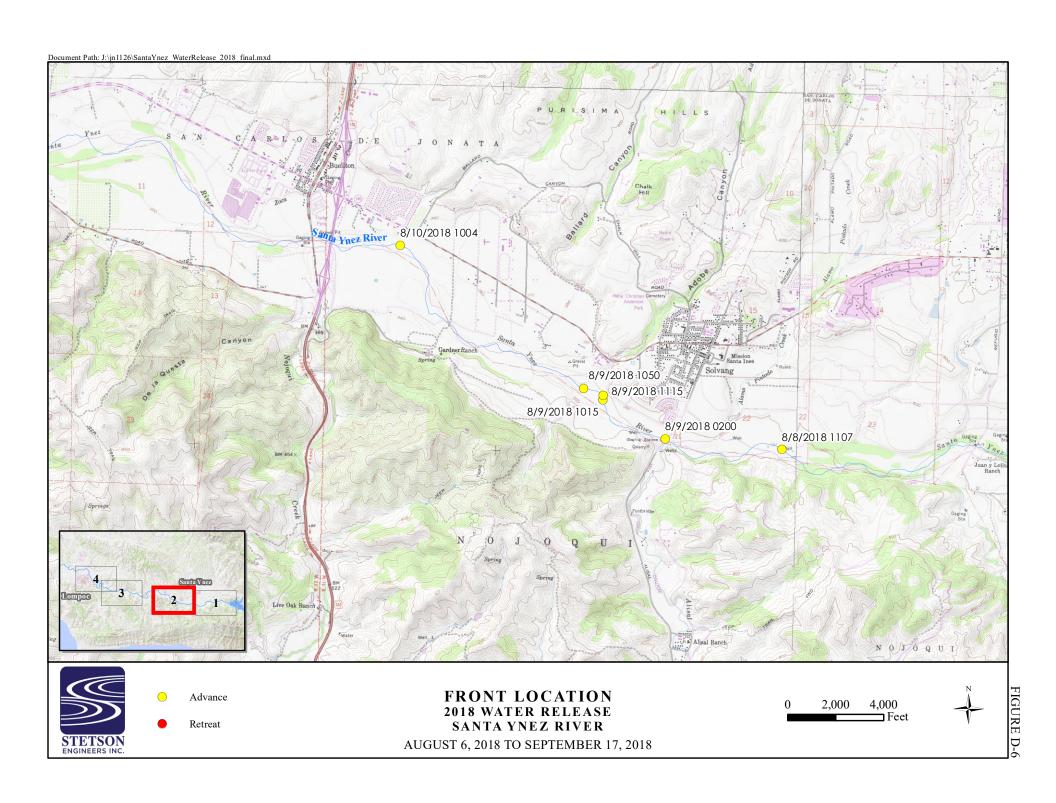

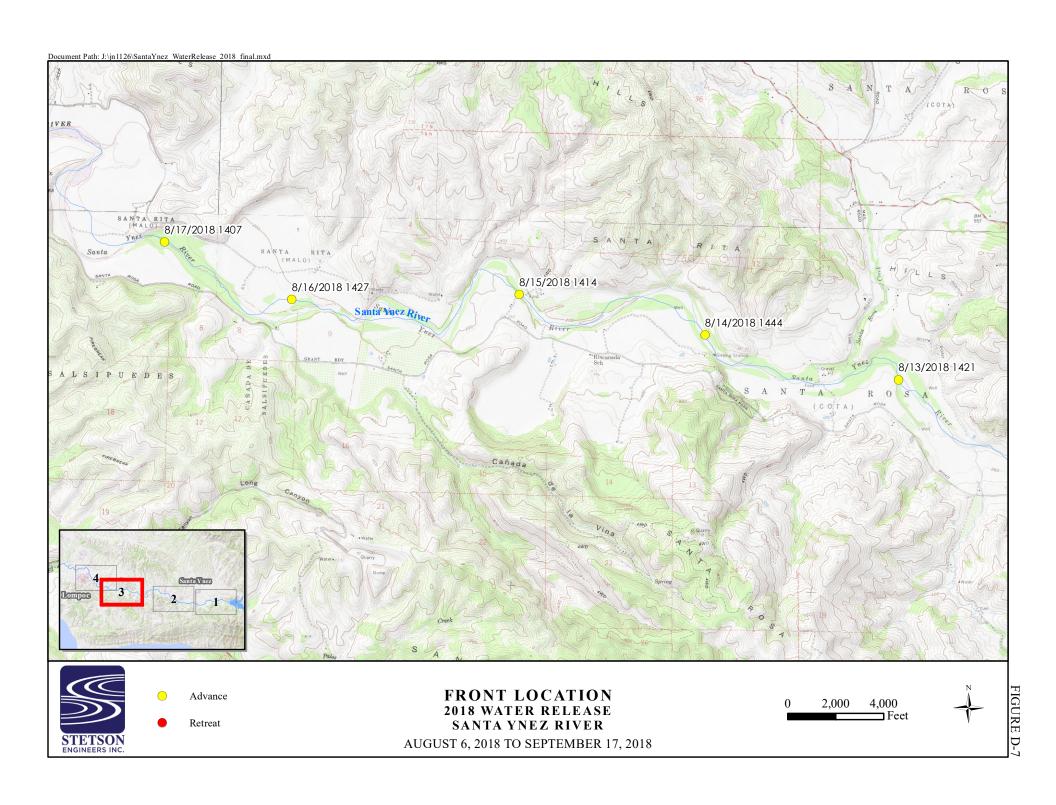

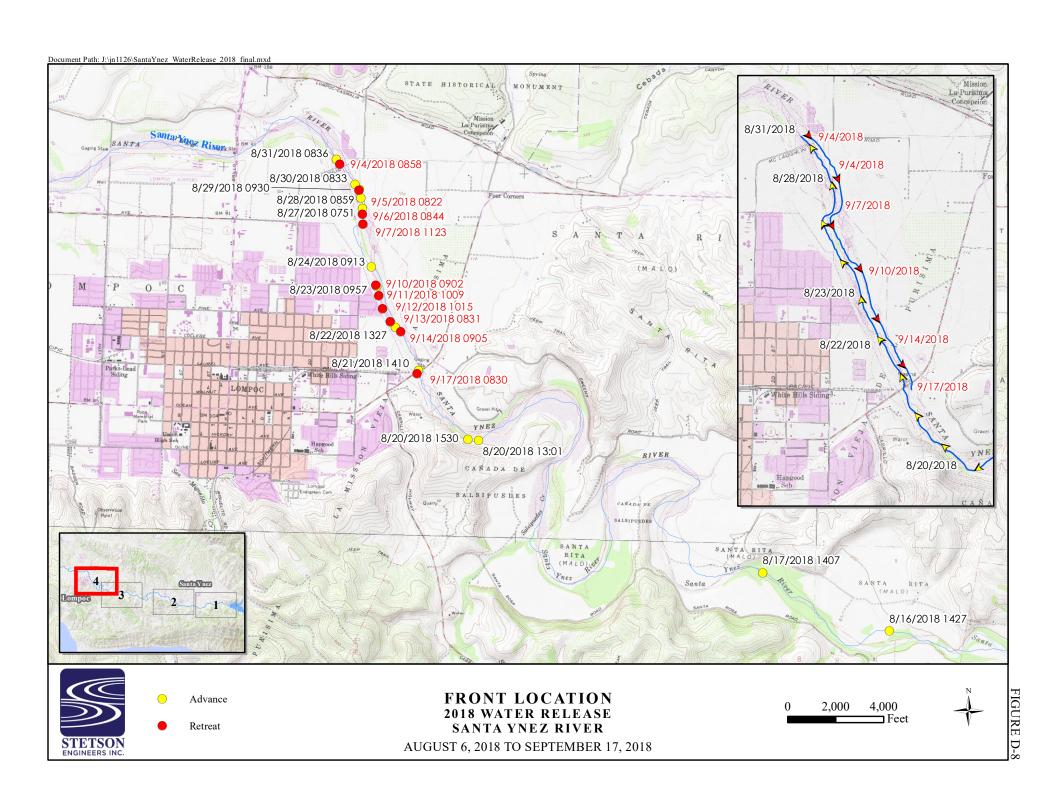

### **Appendix E**

# GENERAL DESCRIPTION OF THE HYDROGEOLOGY OF THE SOURCES OF GROUNDWATER WITHIN THE DISTRICT

### Appendix E

### GENERAL DESCRIPTION OF THE HYDROGEOLOGY OF THE SOURCES OF GROUNDWATER WITHIN THE DISTRICT

#### **Santa Ynez River Alluvial Deposits**

Along the Santa Ynez River channel groundwater occurs in the river channel deposits and thin bodies of younger alluvium. The groundwater is generally unconfined and in hydrologic continuity with surface water. In the Santa Ynez subarea, Bradbury Dam to Solvang, these deposits are almost completely bordered and underlain by non-water bearing consolidated rocks. Replenishment is by natural seepage from the river, seepage from tributaries, return flow from applied water, treated sewage effluent from the City of Solvang waste water treatment plant, and releases from Lake Cachuma to satisfy downstream water rights.

In the Buellton subarea, Solvang to a point about five miles downstream of Buellton, the river channel deposits and younger alluvium partially overlie and abut on the north side of the river channel, older unconsolidated deposits of the Paso Robles formation and Careaga Sand that fill a northwest-trending structural basin (Buellton Upland subarea). The older deposits probably slowly discharge groundwater to the alluvial deposits. Additional recharge to the river alluvium in the Buellton subarea is primarily from seepage from the Santa Ynez River and tributary creeks. During the irrigation season, some return flow recharges these deposits. Treated sewage effluent from the City of Buellton waste water treatment plant also recharges the alluvial groundwater.

The alluvial deposits along the Santa Ynez River in the Santa Rita subarea downstream of the Buellton subarea to the Lompoc Narrows, occur in a very similar condition to those in the Santa Ynez subarea to the extent that they are essentially separated from older unconsolidated deposits by generally non-water bearing consolidated rocks. The alluvial deposits in this subarea are generally unconfined with some local confinement. Recharge is also primarily from the Santa Ynez River, tributary creek seepage and irrigation return flow.

Santa Ynez River alluvial deposits are relatively thin with typical thicknesses of 60 to 80 feet with local thicknesses of more than 100 feet. Wells in these deposits typically yield a few hundred to as high as 1,500 or more gallons per minute (gpm).

The storage capacity of the alluvial deposits under full water conditions as determined in connection with State Water Resources Control Board Order 73-37 is as follows:

Subarea	Acre-Feet
Santa Ynez Subarea	21,000
Buellton Subarea	27,500
Santa Rita Subarea	56,500
TOTAL	105,000

#### Santa Ynez Upland Subarea

The Santa Ynez Upland subarea lies north of the Santa Ynez River and extends westward from about four miles east of Lake Cachuma (Red Rock Canyon) to include the Zaca Creek watershed where the creek crosses the subarea. Relatively non-water bearing rocks separate this subarea from Santa Ynez River alluvium to the south. The northern boundary of the subarea is formed by faulting of consolidated non-water bearing rocks of the San Rafael Mountains against the unconsolidated basin deposits.

The Santa Ynez Upland subarea is comprised of thick unconsolidated deposits primarily of the Paso Robles Formation and the Careaga Sand which are the primary sources of groundwater. Terrace and alluvial deposits are also present in portions of the subarea, but are generally not sources of major groundwater supplies. The thickness of the unconsolidated deposits is generally greater than 1,000 feet with maximum thicknesses of over 3,000 feet at places.

Recharge occurs from the deep percolation of precipitation, seepage from creeks, underflow from consolidated rocks surrounding the subarea and irrigation return flow including return flow from imported Cachuma Project water and pumped underflow of the Santa Ynez River.

The U.S. Geological Survey (USGS) (La Freniere and French, 1968) estimated the groundwater in storage in the Santa Ynez Upland groundwater subarea in 1964 to be ten million acre-feet with about one million acre-feet in the upper 200 saturated feet.

### **Buellton Upland Subarea**

The Buellton Upland subarea generally includes the area north of the Santa Ynez River that extends eastward from the Santa Rita Upland subarea to the east of the City of Buellton. For the most part, this subarea is underlain by the older unconsolidated deposits of the Paso Robles Formation and the Careaga Sand. These deposits fill a synclinal basin which may be an extension of the Santa Rita syncline. If that is the case, this area may be in hydrologic continuity with similar deposits to the west. Recharge to these older deposits is from precipitation falling on the outcrop area and seepage from small creeks that cross the outcrop area.

#### Santa Rita Upland Subarea

Groundwater supplies are present in the older unconsolidated Orcutt Sand, Paso Robles Formation and Careaga Sand which fill a structural basin formed by the eastern portion of the Santa Rita syncline. The Santa Rita Upland subarea is in hydrologic continuity with the Buellton and Lompoc Upland subareas, but is separated from the Santa Ynez River alluvium by non-water bearing rocks. Groundwater is present in a "shallow" perched condition as well as a deep body. Both bodies appear to contain water under unconfined conditions.

#### **Lompoc Area Subareas**

Three groundwater sources are present in the Lompoc area. They include the Lompoc Plain, Lompoc Upland and Lompoc Terrace subareas. The Lompoc Plain subarea is an alluvial filled trough cut into the south limb of the Santa Rita syncline. The principal water-bearing units beneath the Lompoc Plain are the river-channel deposits and younger alluvium that compose the upper aquifer and the Paso Robles Formation and Careaga Sand that comprise the lower aquifer.

The upper aquifer consists of three water-bearing zones: (1) the shallow zone; (2) the middle zone; and (3) the main zone. The main zone of the upper aquifer has been the primary source of water from the Lompoc Plain subarea. The shallow zone includes river-channel deposits and predominately fine grained sand, silt and clay deposits of the upper member of the alluvium that confine or partly confine the underlying deposits in the western, central and northeastern portions of the subarea. The base of the upper member of the alluvium includes interbedded lenses of permeable sand and gravel which the USGS (Bright et al., 1992) refer to as the middle zone. The main zone includes the lower member of the alluvium. Medium to coarse sand and gravel comprise this zone. The main zone throughout most of the Lompoc Plain subarea is separated from the middle zone by lenses of silt and clay that result in confined or partially confined conditions in the main zone. However, in the eastern, southern and northern portions of the Lompoc Plain subarea, the confining deposits are less continuous or absent, allowing movement of groundwater between the shallow, middle and main zones.

The central and northern parts of the western end of the Santa Rita syncline comprise the Lompoc Upland subarea which lies north of the Lompoc Plain. The main water bearing deposits in the subarea are the Paso Robles Formation and Careaga Sand. These deposits extend under the Lompoc Plain to form the lower aquifer. Most of the groundwater in storage occurs in these two formations. Perched groundwater occurs locally in the Orcutt Sand.

The Lompoc Terrace subarea, the hilly area adjacent to the southwest part of the Lompoc Plain subarea, is a down-faulted wedge of Careaga Sand overlain by Orcutt Sand.

Recharge to the aquifers beneath the Lompoc Plain subarea includes infiltration of precipitation, seepage from streams, groundwater underflow from tributary streams, underflow through aquifers underlying the Lompoc Upland and Lompoc Terrace subareas which extend under the Plain (lower aquifer beneath the Lompoc Plain subarea), irrigation return flow and sewage effluent. Recharge to the Lompoc Upland subarea is primarily by infiltration of precipitation, some seepage from streams, and percolation of treated sewage effluent from the Mission Hills Community Services District waste water treatment plant. The Lompoc Upland subarea may also receive underflow along the Santa Rita syncline from the Santa Rita Upland subarea. Recharge to the Lompoc Terrace subarea is mainly from infiltration of precipitation.

The USGS (Miller, 1976) estimated the total groundwater in storage in the Lompoc area as follows:


Subarea	Groundwater in Storage (Acre-Feet)
Lompoc Plain	
Main Zone	80,000
Shallow Zone	135,000
Lompoc Upland	400,000
Lompoc Terrace	100,000
TOTAL	715,000

#### **REFERENCES CITED**


- Bright, D.J. et al., 1992, Ground-Water Hydrology and Quality in the Lompoc Area, Santa Barbara County, California, 1987-88: U.S. Geological Survey Water Resources Investigations Report 91-4172.
- LaFreniere, G.F., and French, J.J. 1968, Ground-Water Resources of the Santa Ynez Upland Ground-Water Basin, Santa Barbara County, California: U.S. Geological Survey Open File Report.
- Miller, G.A., 1976, Ground-Water Resources in the Lompoc Area, Santa Barbara County, California: U.S. Geological Survey Open-File Report 76-183.


# Appendix F WATER-LEVEL HYDROGRAPHS OF SELECTED WELLS


### HYDROGRAPHS OF WELLS LOCATED IN THE LOMPOC PLAIN SUBAREA

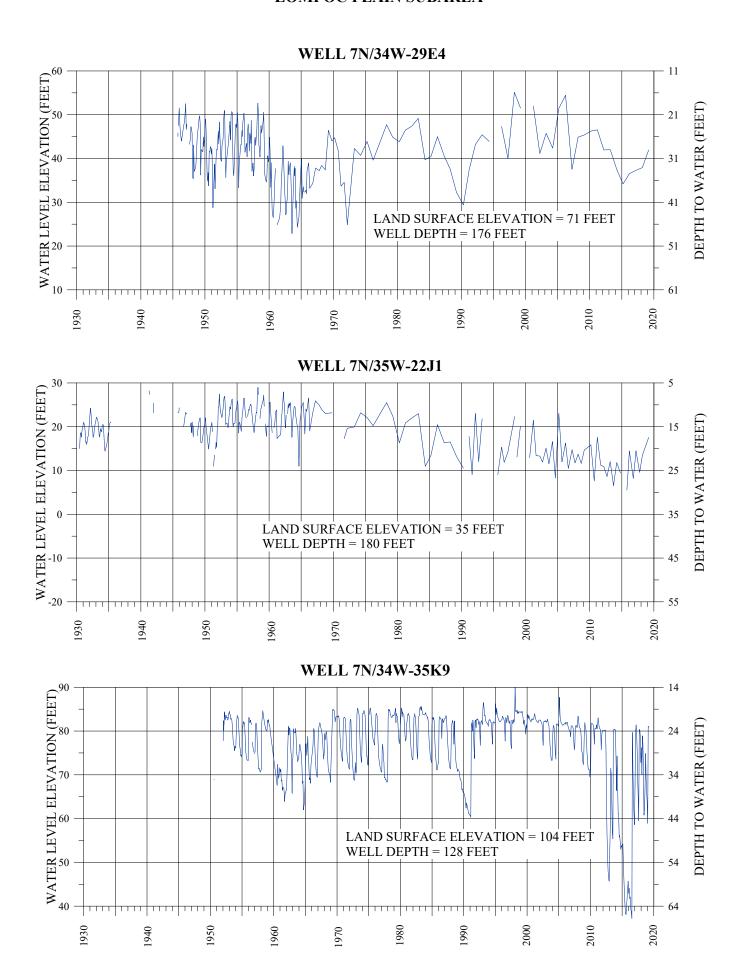


### HYDROGRAPHS OF WELLS LOCATED IN THE LOMPOC UPLAND SUBAREA

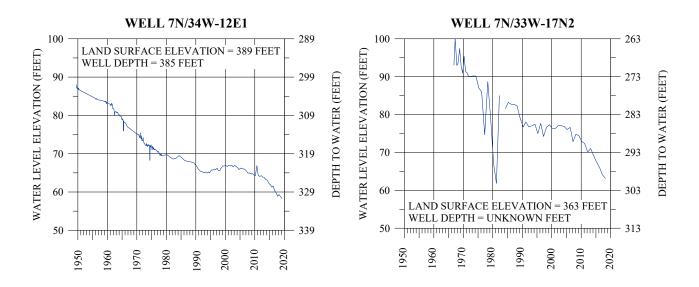


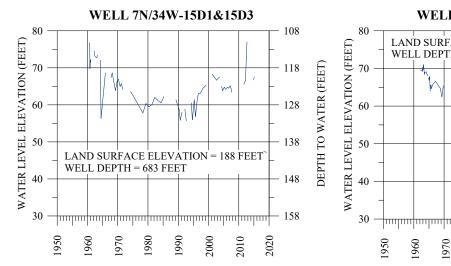




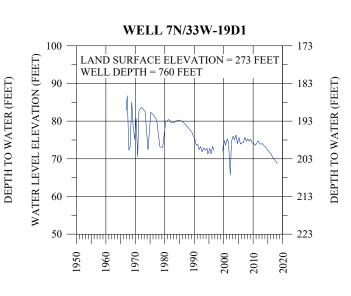



### HYDROGRAPHS OF WELLS LOCATED IN THE SANTA RITA UPLAND, LOMPOC TERRACE, AND **BUELLTON UPLAND SUBAREAS**



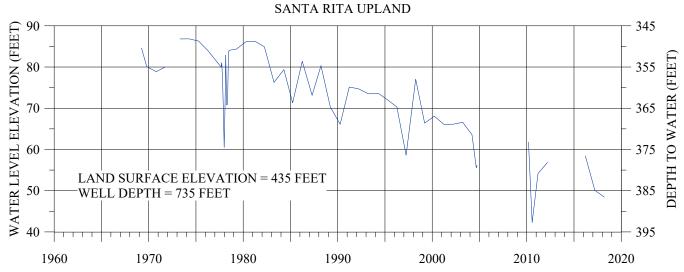


#### WELL 7N/35W-27P1




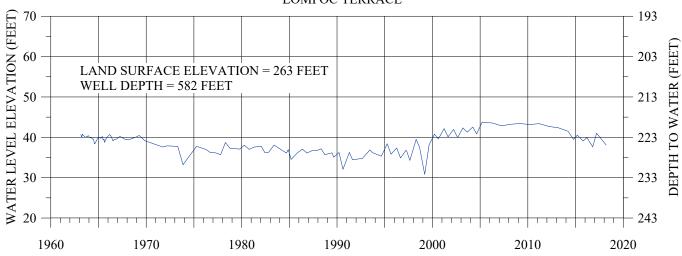


### WELL 6N/31W-7F1

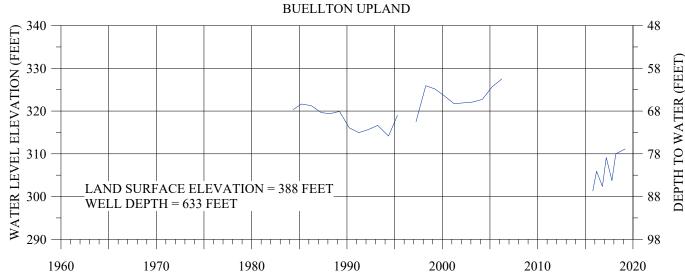


### HYDROGRAPHS OF WELLS LOCATED IN THE SANTA YNEZ UPLAND SUBAREA

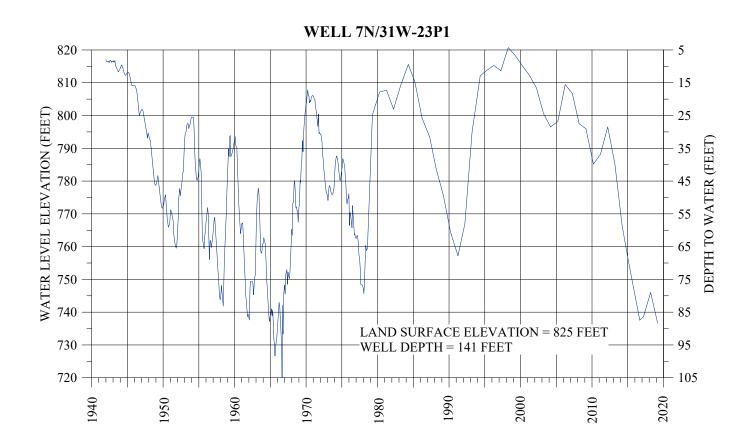

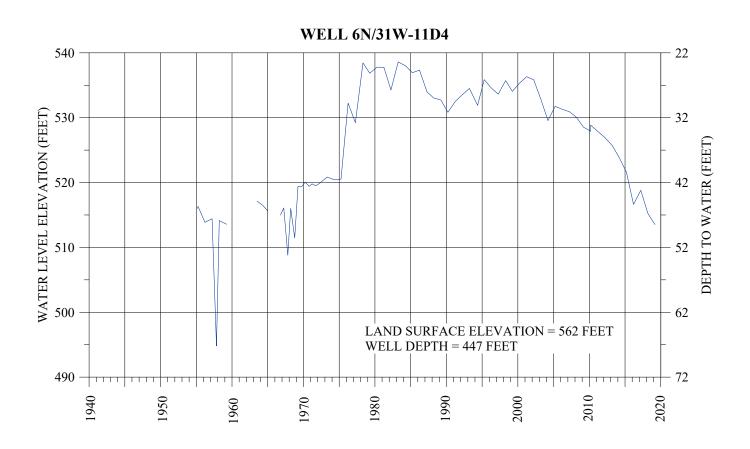

# Appendix G WELL INVENTORY

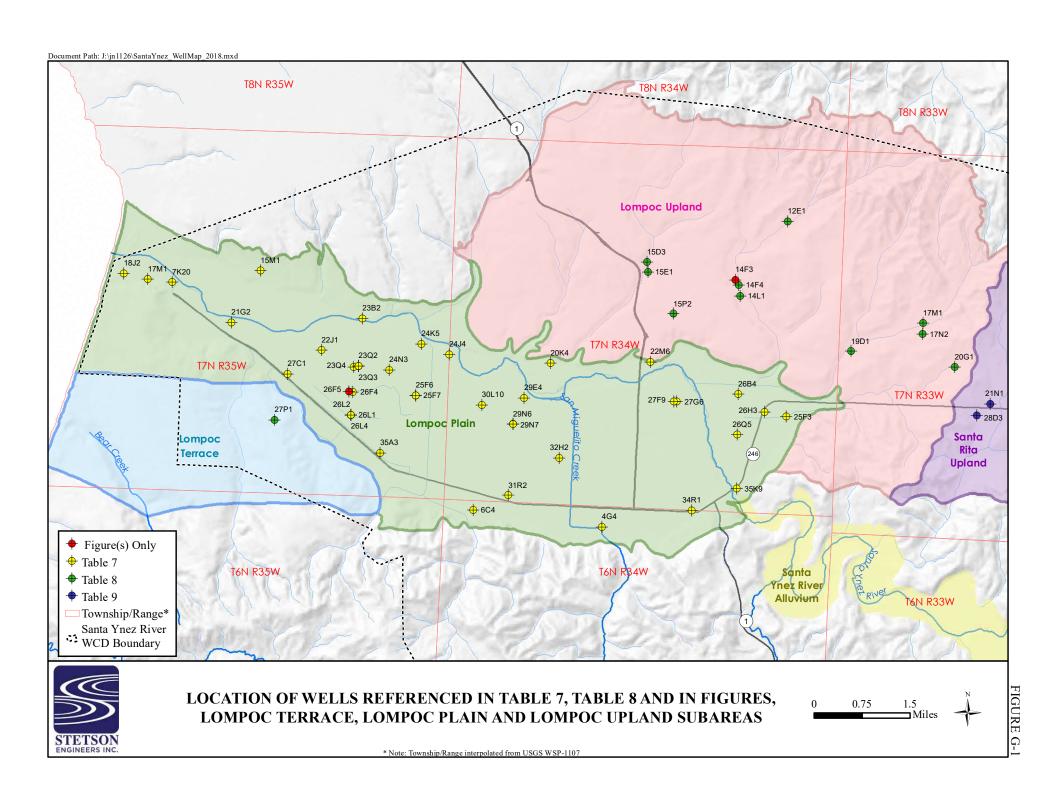

### Spring 2019 Groundwater Measurements for the Western Lompoc Plain

Report	•	J		Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status	
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change
			•				` '		, ,	, ,			
Table 7	7N/35W-17K20	344112120351001	Surf (old Barrier Bridge)	12-Mar	34 41 12"	120 35' 11"	18.11		7.00	-11.11	15.35		-2.8
Table 7	7N/35W-17M1	344114120353501	Surf (near RR xing)	12-Mar	34 41' 14"	120 35' 35"	4.48		9.74	5.26	1.95		-2.5
Table 7	7N/35W-18J2	344118120355902	Surf (S. side of Lagoon)	12-Mar	34 41' 18"	120 35' 59"	1.91		24.00	22.09	2.15		0.2
Table 7	7N/35W-22J1	344021120324101	W Valley: Jordan Farm	12-Mar	34 40' 21"	120 32' 41"	17.43		28.00	10.57	21.57		4.1
	7N/35W-23E6	344043120322406	W Valley: Jordan Farm	12-Mar	34 40' 43"	120 32' 24"	21.94		32.00	10.06	25.71		3.8
	7N/35W-23J5	344025120313701	N Artesia Ave	12-Mar	34 40' 25"	120 31' 37"	20.08		30.00	9.92	25.78		5.7
Table 7	7N/35W-23Q2	344009120320402	W Valley: Jordan Farm	12-Mar	34 40' 09"	120 32' 04"	17.74		37.32	19.58	20.19		2.5
Table 7	7N/35W-23Q3	344009120320403	W Valley: Jordan Farm	12-Mar	34 40' 09"	120 32' 04"	16.00		37.22	21.22	22.40		6.4
Table 7	7N/35W-23Q4	344008120320901	W Valley: Jordan Farm	12-Mar	34 40' 08"	120 32' 09"	15.93		37.10	21.17	22.59		6.7
Table 7	7N/35W-24K5	344029120310305	DeWolf Ave: Henning	12-Mar	34 40' 29"	120 31' 03"	21.24		35.00	13.76	26.03		4.8
Table 7	7N/35W-24N3	344046120321401	N Artesia Ave: Beattie	12-Mar	34 40' 07"	120 31' 34"	12.98		36.09	23.11	19.06		6.1
Table 7	7N/35W-25F6	343947120310703	NW of DeWolf & Central	12-Mar	34 39' 47"	120 31' 07"	16.40		35.77	19.37	17.99		1.6
Table 7	7N/35W-25F7	343947120310702	NW of DeWolf & Central	12-Mar	34 39' 47"	120 31' 07"	11.58		36.00	24.42	9.82		-1.8
Table 7	7N/35W-26F4	343948120320901	W Valley: Jordan Farm	12-Mar	34 39' 48"	120 32' 09"	14.60		46.00	31.40	20.87		6.3
Table 7	7N/35W-26L1	343929120321001	W of Union Sugar Ave	12-Mar	34 39' 29"	120 32' 10"	4.76		42.00	37.24	7.79		3.0
Table 7	7N/35W-26L2	343929120321002	W of Union Sugar Ave	12-Mar	34 39' 29"	120 32' 10"	5.51		47.00	41.49	10.06		4.6
Table 7	7N/35W-26L4	343929120321004	W of Union Sugar Ave	12-Mar	34 39' 29"	120 32' 10"	7.80		47.00	39.20	15.02		7.2
Table 7	7N/35W-27C1	344001120331401	Ocean Ave & Renwick	12-Mar	34 40' 01"	120 33' 14"	13.17		51.00	37.83	20.79		7.6
Table 7	7N/35W-35A3	343859120314003	S Artesia Ave	12-Mar	34 38' 59"	120 31' 40"	18.05		52.00	33.95	22.15		4.1

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; Z = other, a blank implies a normal water level measurement...

Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency. One new well added: 7N/35W-23J5

### Spring 2019 Groundwater Measurements for the Central and Eastern Lompoc Plain

	- Gg		u.oouou.oo						•				
Report				Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status	
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change
Table 7	6N/34W-6C4	343815120300602 E	E of San Pasqual Rd	11-Mar	34 38' 15"	120 30' 06"	67.66		46.00	-21.66	77.48		9.8
Table 7	7N/34W-20K4	344017120285502 U	JSPrison E of Floradale	11-Mar	34 40' 17"	120 28' 55"	30.30		47.00	16.70	34.16		3.9
	7N/34W-22J6	344033120263404 E	ELV; W of Rucker Rd	11-Mar	34 40' 33"	120 26' 34"	49.61		48.00	-1.61	50.82		1.2
	7N/34W-24N1	344010120251601 F	Purisima Mission nr 246	12-Mar	34 40' 10"	120 25' 16"	82.21		49.00	-33.21	83.43		1.2
Table 7	7N/34W-26H3	343943120252201 E	Eastern Lompoc Valley	11-Mar	34 39' 43"	120 25' 22"		D	50.00	==			
Table 7	7N/34W-27G6	343949120264901 E	of North A Street	11-Mar	34 39' 49"	120 26' 49"	39.31		51.00	11.69	41.30		2.0
Table 7	7N/34W-29E4	343948120292002 E	E of Floradale: J Fischer	11-Mar	34 39' 48"	120 29' 20"	29.05		52.00	22.95	33.08		4.0
Table 7	7N/34W-29N6	343926120293001 E	E of Floradale: Bob Witt	11-Mar	34 39' 26"	120 29' 30"	30.46		53.00	22.54	34.48		4.0
Table 7	7N/34W-29N7	343926120293002 E	E of Floradale: Bob Witt	11-Mar	34 39' 26"	120 29' 30"	29.92		54.00	24.08	35.53		5.6
Table 7	7N/34W-30L10	343941120300106 5	SW cor Central & Leege	11-Mar	34 39' 41"	120 30' 01"	25.23		55.00	29.77	30.88		5.7
Table 7	7N/34W-31R2	343828120293201 N	NW of Floradale-Ocean	11-Mar	34 38' 28"	120 29' 32"	35.62		56.00	20.38	42.72		7.1
Table 7	7N/34W-32H2	343901120284201 E	E of Bailey: Wineman	11-Mar	34 39' 01"	120 28' 42"	38.82		57.00	18.18	40.76		1.9
Table 7	7N/34W-35K9	343840120254701 E	Eastern Lompoc Valley	11-Mar	34 38' 40"	120 25' 47"	22.29		58.00	35.71	33.93		11.6
Table 7	7N/35W-24J4	344021120303504 A	At N end of Douglas Ave	11-Mar	34 40' 21"	120 30' 35"	27.37		59.00	31.63	33.01		5.6

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; Z = other, a blank implies a normal water level measurement...

7N/34W-35K9 is monitored by the USGS and USBR. Monthly USBR records are used in Figure F-1 and Table 7. Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency.

### Spring 2019 Groundwater Measurements for Vandenberg Air Force Base

Report				Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status	
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change
	6N/36W-26G1	343426120380901	South VAFB near SLC6	9-Apr	34 38' 15"	120 30' 06"			46.00		50.35		
	6N/36W-26C1	343445120382601	South VAFB near SLC6	9-Apr	35 38' 15"	121 30' 06"	33.31		47.00	13.69	42.91		9.6
	6N/36W-1K2	343755120372601	South VAFB near SLC4	9-Apr	36 38' 15"	122 30' 06"	150.41		48.00	-102.41	150.41		0.0
Table 7	7N/35W-22M1	344025120333401	W of VAFB entrance N	17-Apr	43 38' 15"	129 30' 06"	11.43		55.00	43.57	14.89		3.5
Table 7	7N/35W-15M1	344124120334401	W. of 13th; N. of SYRivr	17-Apr	46 38' 15"	132 30' 06"	101.93		58.00	-43.93	102.21		0.3
Table 7	7N/35W-21G2	344041120341101	AFB: 3300' NW of 22M1	17-Apr	44 38' 15"	130 30' 06"			56.00		13.41		
Table 7	7N/35W-23B2	344048120320201	N of SY River on VAFB	17-Apr	45 38' 15"	131 30' 06"	26.20		57.00	30.80	26.99		8.0
	7N/35W-27F1	343952120332001	E. of So. VAFB entrance	9-Apr	40 38' 15"	126 30' 06"	9.80		52.00	42.20	13.00		3.2
	7N/35W-27H5	343941120325701	E. of So. VAFB entrance	9-Apr	41 38' 15"	127 30' 06"	8.19		53.00	44.81	15.78		7.6
	7N/35W-27J1	343942120325701	E. of So. VAFB entrance	9-Apr	42 38' 15"	128 30' 06"	12.71		54.00	41.29	16.96		4.3
Table 8	7N/35W-27P1	343923120332501	S. VAFB (Lom Terrace)	9-Apr	39 38' 15"	125 30' 06"	222.59		51.00	-171.59	224.90		2.3
	7N/35W-30G1	343944120361901	South VAFB - Wade Rd.	9-Apr	38 38' 15"	124 30' 06"			50.00		98.86		
	7N/35W-31J2	343841120355202	South VAFB: Bear Cyn.	9-Apr	37 38' 15"	123 30' 06"	5.79		49.00	43.21	6.11		0.3

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; Z = other; a blank implies a normal water level measurement

Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency.

### Spring 2019 Groundwater Measurements for Lompoc Uplands

		. •				•								
Report				Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status		
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change	_
Table 8	7N/33W-17M1	344100120224901	Upper Cebada Canyon	13-Mar	34 41' 00"	120 22' 49"	277.39		46.00	-231.39	276.27		-1.1	
Table 8	7N/33W-17N2	344051120224901	Upper Cebada Canyon	12-Mar	34 40' 51"	120 22' 49"		P	47.00		299.85			
Table 8	7N/33W-19D1	344035120235901	Lower Cebada Canyon	15-Apr	34 40' 35"	120 23' 59"	204.63		48.00	-156.63	204.25		-0.4	
Table 8	7N/33W-20G1	344025120221601	W of Tularosa Road	8-Mar	34 40' 25"	120 22' 16"		0	49.00		324.51			
Table 8	7N/34W-12E1	344219120250601	N of Mission Hills	13-Mar	34 42' 19"	120 25' 06"	330.64		50.00	-280.64	329.64		-1.0	
Table 8	7N/34W-14F4	344126120255201	Mission Hills CSD	13-Mar	34 41' 26"	120 25' 52"		P	51.00		230.59			
Table 8	7N/34W-14L1	344117120255001	Mission Hills CSD	13-Mar	34 41' 17"	120 25' 50"	218.37		52.00	-166.37	220.02	S	1.7	
Table 8	7N/34W-15D3	344142120272301	Vandnbrg Village CSD	16-Mar	34 41' 42"	120 27' 23"	140.80		53.00	-87.80	140.62		-0.2	
Table 8	7N/34W-15E1	344134120272201	Vandnbrg Village CSD	15-Mar	34 41' 34"	120 27' 22"	136.28	R	54.00	-82.28	135.56	S	-0.7	
Table 8	7N/34W-15P2	344101120265901	Uplands E of Hyw 1	13-Mar	34 41' 00"	120 27' 04"	261.05		55.00	-206.05	260.73		-0.3	

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; Z = other, a blank implies a normal water level measurement...

Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency.

### **United States Bureau of Reclamation and Others**


USBR 1243 'N' Street, Fresno, CA 93721 (559) 262-0359 http://www.usbr.gov

### Spring 2019 Groundwater Measurements for Wells not Monitored by the County of Santa Barbara

Report	•			Date			Depth to	Well Elev.	W.S.E.L. Spr. 2019	Spring	2018	
Location	Well ID#	USGS #	Source	of Read	Latitude	Longitude	Water (ft)	(ft, MSL)	(ft, MSL)	DTW	W.S.E.L.	change
Table 7	7N/34W-22M6	344021120271301	USBR	March	34 40' 21"	120 27' 13"	46.6	100	53.4	46.5	53.5	-0.1
Table 7	7N/34W-26B4	343957120254501	USBR	March	34 39' 57"	120 25' 45"	69.7	110	40.3	68.4	41.6	-1.3
Table 7	7N/34W-27F9		USBR	March	34 39' 49"	120 26' 52"			45.0		43.9	1.1
Table 7	7N/34W-26Q5	343924120254501	USBR	March	34 39' 24"	120 25' 45"	49.8	105	55.2	55	50.0	5.2
Table 7	7N/34W-25F3	343940120245702	USBR	March	34 39' 40"	120 24' 57"	85.7	130	44.3	85.7	44.3	0.0
Table 7	6N/34W-4G4	343805120275501	USBR	March	34 38' 05"	120 27' 55"	51.6	97.5	45.9	55.5	42.0	3.9
Table 7	7N/34W-34R1	343821120262701	USBR	March	34 38' 21"	120 26' 27"	57.9	112	54.1	65.4	46.6	7.5
Table 7	7N/34W-35K9	343840120254701	USBR	March	34 38' 40"	120 25' 47"	23.1	101	77.9	25.1	75.9	2.0
Figure 8	7N/35W-26F5	343948120320902			34 39' 48"	120 32' 09"		35				
Figure F-2	2 7N/34W-14F3	344130120255201			34 41' 30"	120 25' 52"		268				
Table 9	6N/32W-12K2	343649120114401	Buellton	March	34 36' 49"	120 11' 44"	53	350	297	50	300	-3

**Bolded** are reported values.

7N/34W-35K9 is monitored by the USGS and USBR. Monthly USBR records are used in Figure F-1 and Table 7.

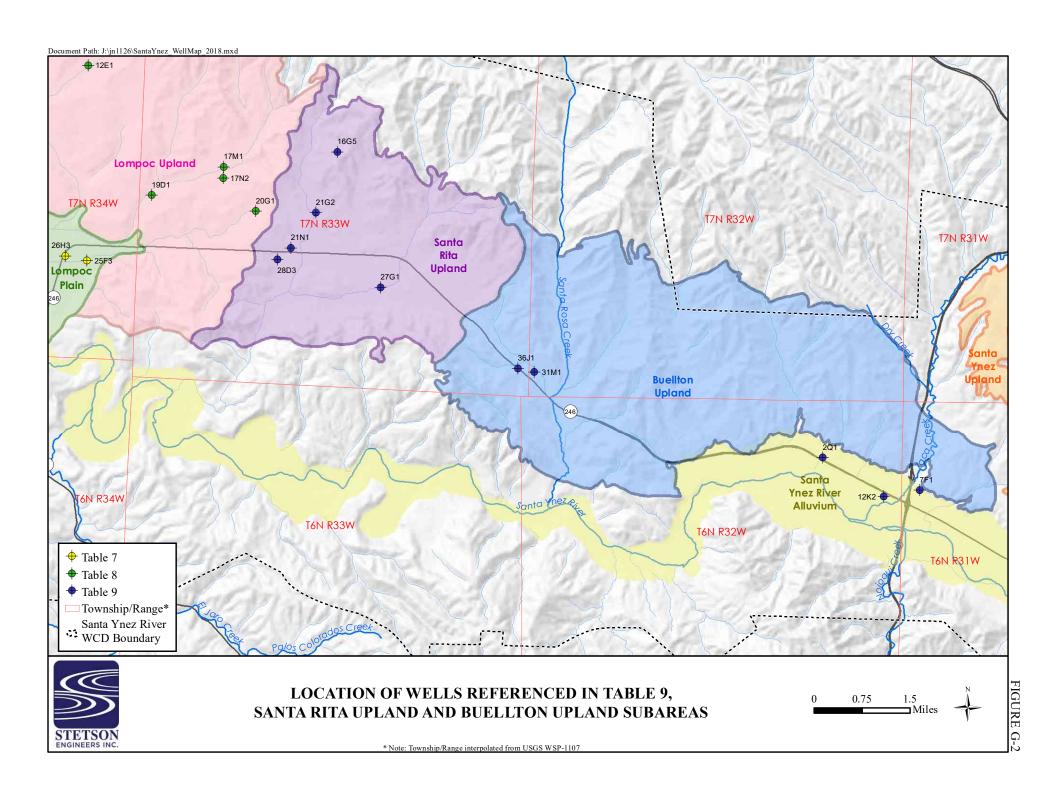

#### Spring 2019 Groundwater Measurements for Santa Rita and Santa Rosa Areas

Report	•	•		Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status	
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change
	6N/32W-11L4	343644120131101	SYR Alluvial; Buellton	7-Mar	34 36' 44"	120 13' 11"	38.11		46.00	7.89	40.75		2.6
	6N/32W-16P3	343544120151801	SYR Alluvial; Santa Rita	7-Mar	34 35' 44"	120 15' 18"	44.58		47.00	2.42	46.86		2.3
	6N/32W-18H1	343613120164501	SYR Alluvial; Santa Rita	7-Mar	34 36' 13"	120 16' 45"	30.85		48.00	17.15	35.11		4.3
	6N/33W-8J3	343645120220301	SYR; BIG E packing plnt	7-Mar	34 36' 45"	120 22' 03"	42.50		49.00	6.50	45.14		2.6
	6N/33W-8R1	343640120220401	SYR; BIG E packing plnt	6-Mar	34 36' 40"	120 22' 04"	47.19		50.00	2.81	50.33		3.1
	6N/33W-9M1	343647120215001	SYR; BIG E packing plnt	7-Mar	34 36' 47"	120 21' 50"	45.82		51.00	5.18	48.07		2.3
	6N/34W-12C5	343735120245902	SYR Alluvial; Santa Rita	7-Mar	34 37' 36"	120 24' 59"	44.32		52.00	7.68			
Table 9	7N/32W-31M1	343821120173601	Drum Cyn - Santa Rosa	8-Mar	34 38' 21"	120 17' 36"	77.40		53.00	-24.40			
	7N/32W-7B1	344215120170001	Drum Cyn - Santa Rosa	8-Mar	34 42' 15"	120 17' 00"		D	54.00				
Table 9	7N/33W-16G5	344115120212601	Mid Santa Rita Valley	8-Mar	34 41' 15"	120 21' 26"		Z	55.00		387.36		
Table 9	7N/33W-21G2	344025120211501	Mid Santa Rita Valley	8-Mar	34 40' 25"	120 21' 15"	353.31		56.00	-297.31	351.01		-2.3
Table 9	7N/33W-21N1	343956120214001	W Santa Rita Valley	8-Mar	34 39' 56"	120 21' 40"	301.70		57.00	-244.70	301.95		0.3
Table 9	7N/33W-27G1	343926120201001	E Santa Rita Valley	8-Mar	34 39' 26"	120 20' 10"	381.18		58.00	-323.18	386.13		4.9
Table 9	7N/33W-28D3	343946120215301	W Santa Rita Valley	8-Mar	34 39' 46"	120 21' 53"	305.64		59.00	-246.64	307.16		1.5
Table 9	7N/33W-36J1	343824120175201	Drum Cyn - Santa Rosa	8-Mar	34 38' 24"	120 17' 52"	130.35		60.00	-70.35	130.72		0.4

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; a blank implies a normal water level measurement...

7N/34W-35K9 is monitored by the Santa Barbara County and USBR. Monthly USBR records are used in Figure F-1 and Table 7.


Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency. One new well added: 7N/32W-7B1

### Spring 2019 Groundwater Measurements for Buellton, Solvang and Los Olivos Areas

						•	•							
Report				Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status		
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change	
Table 10	6N/31W-10F1	343656120080601	Fredenborg Cyn: Solvng	4-Mar	34 36' 56"	120 08' 06"	80.60		46.00	-34.60	80.66		0.1	
Table 10	6N/31W-11D4	343705120071001	Alamo Pintado Road	11-Mar	34 37' 05"	120 07' 10"	48.48		47.00	-1.48	46.78		-1.7	
	6N/31W-17F1	343609120101201	SYR Alluvial; Buellton	4-Mar	34 36' 09"	120 10' 12"	37.94	R	48.00	10.06				
	6N/31W-17F3	343608120101001	SYR Alluvial; Buellton	4-Mar	34 36' 08"	120 10' 10"	38.68		49.00	10.32	39.79	R	1.1	
Table 10	6N/31W-2K1	343741120064801	Alamo Pintado Road	11-Mar	34 37' 41"	120 06' 48"	48.42		50.00	1.58	48.72		0.3	
Table 10	6N/31W-3A1	343759120072901	Hilltop West of Ballard	11-Mar	34 37' 59"	120 07' 29"	153.36		51.00	-102.36	154.60		1.2	
Table 10	6N/31W-4A1	343800120083001	Ballard Cyn nr Solvang	13-Mar	34 38' 00"	120 08' 30"	108.08		52.00	-56.08	108.01		-0.1	
Table 9	6N/31W-7F1	343655120111201	Buellton Upland Well	4-Mar	34 36' 55"	120 11' 12"	76.89		53.00	-23.89	78.01		1.1	
Table 9	6N/32W-2Q1	343719120124901	SYR Alluvial; Buellton	4-Mar	34 37' 19"	120 12' 49"	61.41		54.00	-7.41	62.51		1.1	
Table 10	7N/31W-22A3	344044120072801	Foxen Cyn nr Los Olivos	4-Mar	34 40' 44"	120 07' 28"		X	55.00					
Table 10	7N/31W-23P1	344002120070001	Los Olivos: Matties Tav	4-Mar	34 40' 02"	120 07' 00"	88.32		56.00	-32.32	78.97		-9.3	
	7N/31W-34M2	343833120082001	Ballard Cyn nr Solvang	4-Mar	34 38' 24"	120 08' 18"	177.17		57.00	-120.17	177.07		-0.1	
Table 10	7N/31W-36L2	343831120055001	Refugio Rd N of Baseln	4-Mar	34 38' 31"	120 05' 50"	96.49		58.00	-38.49	93.11		-3.4	
Table 10	8N/30W-30R1	344420120041701	Midland School	4-Mar	34 44' 20"	120 04' 17"		P	59.00	==	22.68			
	8N/30W-30R2	344419120042101	Midland School	13-Mar	35 44' 20"	121 04' 17"	48.37	P	60.00	11.63	47.87	R	-0.5	
Table 10	8N/31W-36H1	344354120051501	Midland School	13-Mar	34 43' 54"	120 05' 15"	15.19		61.00	45.81	48.16		33.0	

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; a blank implies a normal water level measurement...

Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency. One well removed: 7N/31W-35K4

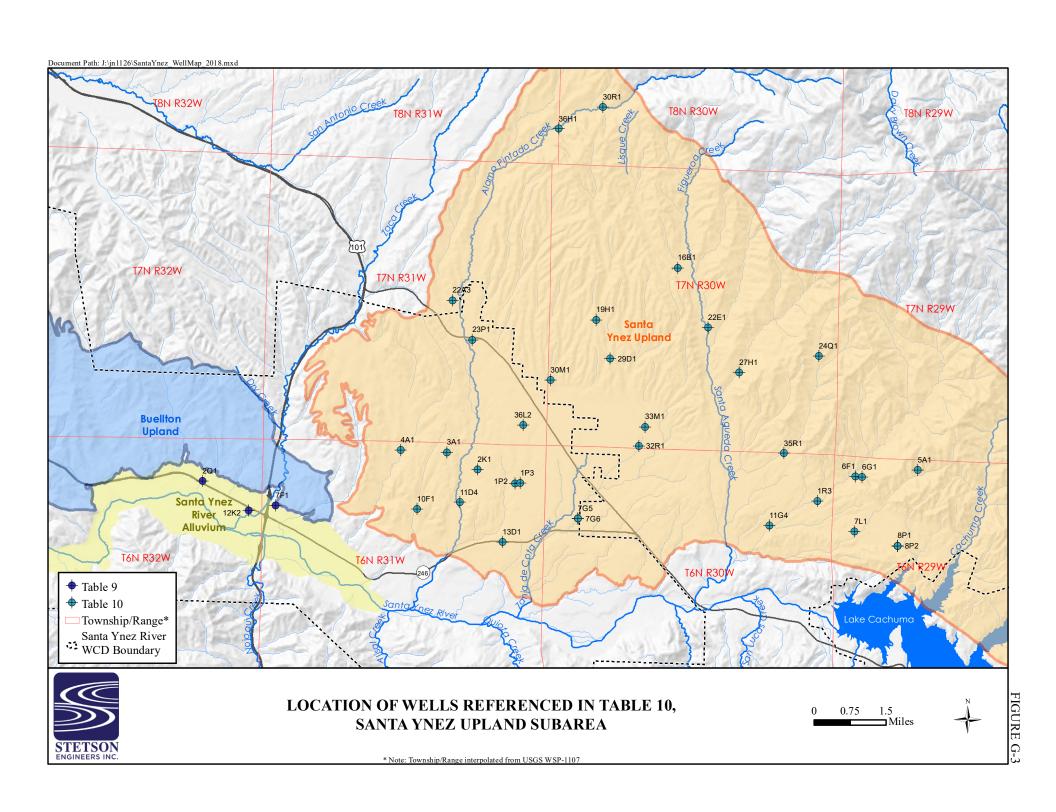

#### Spring 2019 Groundwater Measurements for Santa Ynez to Lake Cachuma Areas

Report	•	· ·		Date			Depth to	Sta-	Well Elev.	W.S.E.L. Spr. 2019	Spring	Status	
Location	Well ID#	USGS#	Locality	of Read	Latitude	Longitude	Water (ft)	tus*	(ft, MSL)	(ft, MSL)	2018 read	2018*	change
	5N/29W-1C1		San Marcos Ranch			119 52' 22"	4.12		62.00	57.88	11.52		7.4
Table 10	6N/29W-5A1		Phillips Ranch - North			119 57' 09"		D	63.00				
Table 10	6N/29W-6F1		Happy Cyn: Kastner			119 58' 31"			64.00		17.35		
Table 10	6N/29W-6G1		Happy Cyn: Kastner			119 58' 22"	50.25		65.00	14.75	51.36		1.1
Table 10	6N/29W-7L1		N of Rd to Phillips Rnch			119 58' 30"	210.52		66.00	-144.52	216.59		6.1
Table 10	6N/29W-8P1		Phillips Ranch @ House			119 57' 33"	229.37		67.00	-162.37	224.49		-4.9
Table 10	6N/29W-8P2		Phillips Ranch @ House	-		119 57' 33"	233.32		68.00	-165.32	227.76		-5.6
	6N/30W-11G1		Happy Cyn: Westerly			120 00' 18"		Z	69.00				
Table 10	6N/30W-11G4		Happy Cyn: Westerly			120 00' 25"	152.09		70.00	-82.09	156.11		4.0
Table 10	6N/30W-1R3	343718119592001	Happy Canyon	11-Mar	34 37' 18"	119 59' 20"	22.63	S	71.00	48.37	30.03	S	7.4
Table 10	6N/30W-7G5	343651120043401	S Ynez off Meadowvale	4-Mar	34 36' 51"	120 04' 34"	76.50		72.00	-4.50	76.71		0.2
Table 10	6N/30W-7G6	343651120043402	S Ynez off Meadowvale	4-Mar	34 36' 51"	120 04' 34"	75.80		73.00	-2.80	76.26		0.5
Table 10	6N/31W-13D1	343623120061201	Santa Ynez: nr Hyw 246	4-Mar	34 36' 23"	120 06' 12"	116.77		74.00	-42.77	116.68		-0.1
Table 10	6N/31W-1P2	343727120055801	West of Refugio Road	4-Mar	34 37' 27"	120 05' 58"	74.68		75.00	0.32	74.54		-0.1
Table 10	6N/31W-1P3	343728120055101	West of Refugio Road	5-Mar	34 37' 28"	120 05' 51"	104.07		76.00	-28.07	103.85		-0.2
	7N/29W-29R1	343900119570201	Happy Canyon	5-Mar	34 39' 00"	119 57' 02"	59.64		77.00	17.36	65.74		6.1
	7N/29W-29R2	343900119570301	Happy Canyon	5-Mar	34 39' 00"	119 57' 03"	58.65		78.00	19.35	64.83		6.2
Table 10	7N/30W-16B1	344127120023301	Sedgewick Ranch	13-Mar	34 41' 27"	120 02' 33"	34.71		79.00	44.29	33.76		-1.0
Table 10	7N/30W-19H1	344028120041801	SY Upl: Long Cyn Loop	4-Mar	34 40' 28"	120 04' 18"	178.84		80.00	-98.84	178.47		-0.4
Table 10	7N/30W-22E1	344023120015101	Bar-Go Ranch	13-Mar	34 40' 23"	120 01' 51"	12.18	P	81.00	68.82	10.62	R	-1.6
	7N/30W-22E2	344028120015701	Bar-Go Ranch	13-Mar	34 40' 28"	120 01' 57"	143.72		82.00	-61.72	192.80		49.1
Table 10	7N/30W-24Q1	343956119592401	Starlane Ranch	5-Mar	34 39' 56"	119 59' 24"	56.02		83.00	26.98	58.54		2.5
	7N/30W-25Q2	343907119593001	Starlane Ranch mid-cyn		34 39 07'	119 59' 30"			84.00		334.78		
Table 10	7N/30W-27H1	343935120010801	Bar-Go Ranch	13-Mar	34 39' 35"	120 01' 08"	6.99		85.00	78.01			
Table 10	7N/30W-29D1	343946120035801	SY Upl: Long Cyn Loop	4-Mar	34 39' 46"	120 03' 58"	51.71		86.00	34.29	53.92		2.2
Table 10	7N/30W-30M1	343921120051601	SY Upl: Long Cyn Loop	4-Mar	34 39' 21"	120 05' 16"	240.70		87.00	-153.70			
Table 10	7N/30W-32R1	343812120031701	NW Baseline-Mora Jct	4-Mar	34 38' 12"	120 03' 17"			88.00				
Table 10	7N/30W-33M1	343833120030901	300 ft W of Mora Ave	4-Mar	34 38' 34"	120 03' 00"	235.51		89.00	-146.51	235.32	R	-0.2
Table 10	7N/30W-35R1	343809120000601	Nr Starlane entrance rd	15-Mar	34 38' 09"	120 00' 06"		D	90.00				
	7N/30W-36N2	343809120000301	Starlane lower 1	11-Mar	34 38 09'	120 00' 03"		0	91.00				
	7N/30W-36N3	343814119595901	Starlane lower 2	11-Mar	34 38 14'	119 59' 59"	324.76		92.00	-232.76			

<sup>\*</sup> Status Information: P = pumping; R = recently pumped; S = nearby pumping; T = nearby recently pumped; O = obstruction; D = dry; X = well is destroyed; a blank implies a normal water level measurement...

Note (2019): Well ordering on this table updated to match as received from Santa Barbara County Water Agency.